AMD Alveo™ U55C Accelerator Card



OVERVIEW

Next-generation HPC applications need to do more with each watt: squeeze more out of each clock cycle, scale out more efficiently, and do the same amount of work while moving data less.

Built from the ground up to deliver the best performance-per-watt for HPC and Big Data workloads, the AMD Alveo™ U55C accelerator card delivers the efficiency and scalability called for by the most demanding applications. The U55C delivers dense compute and HBM, with onboard 200Gbps networking enabling massive scale-out using AMD's groundbreaking open-standards based clustering.

AMD ALVEO™ ADVANTAGES

Built around AMD's powerful <u>Virtex™ XCU55 UltraScale+ FPGA</u>, the AMD Alveo™ U55C card delivers blazing fast application acceleration. The U55C harnesses the power of AMD Adaptive Computing to deliver extraordinary performance unmatched by competing architectures, with:



KEY FEATURES

- > High-performance, low power High Bandwidth Memory (HBM2)
- > High performance-per-watt
- > Fast and easy clustering
- > Onboard 200 Gbps networking
- > Single-slot, small form factor design



SPECIFICATION

Features	AMD Alveo™ U55C Card
Architecture	Virtex UltraScale+
LUTs	1,304K
Registers	2,607K
DSP Slices	9,024
Form Factor	Single Slot, Full Height, Half Length
Micro-USB	Yes
HBM Memory	16GB
HBM Bandwidth	460 GB/s
N/W Interface	2 x QSFP28 ports
PCI Express	PCle Gen3 x 16, 2 x PCle Gen 4x8
Thermal Solution	Passive
Power (TDP)	115W
Tool Support	Vitis™

HPC CLUSTERING FOR EVERY DATA CENTER

AMD U55C customers can scale-out their deployment across hundreds of AMD Alveo™ U55C cards with AMD's standards-based, API-driven HPC clustering solution. Alveo accelerators can cluster over a data center's existing infrastructure and network, with lossless performance requiring no proprietary hardware, while eliminating vendor lock in.



Scale Out Architecture on RoCE v2 and DCBx with existing data center server infrastructure



Shared workload and shared memory across multiple cards



MPI enables hyper-parallelism of AMD Adaptive Compute across nodes

HIGH LEVEL PROGRAMMABILITY WITH VITIS™


AMD's Vitis Unified Software

<u>Platform</u> targets the U55C with high high-level programmability of both the application and cluster, enabling a world of developers and data scientists to unlock the performance benefits of AMD Adaptive Computing.

Vitis™ includes an extensive set of opensource, performance-optimized libraries that offer out-of-the-box acceleration with minimal to zero-code changes to your existing applications.

Vitis HPC Clustering Libraries

- > Ease of programming
- > Custom data movement
- > Write your application in C/C++

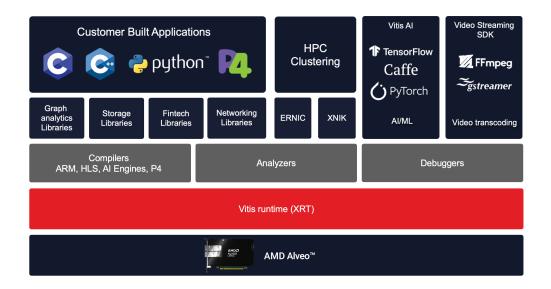

TAKE THE NEXT STEP

- > AMD Alveo™ U55C Accelerator Card
- > High Performance Computing Libraries
- Database Analytics Libraries

DISCLAIMERS

The information contained herein is for informational purposes only and is subject to change without notice. While every precaution has been taken in the preparation of this document, it may contain technical inaccuracies, omissions and typographical errors, and AMD is under no obligation to update or otherwise correct this information. Advanced Micro Devices, Inc. makes no representations or warranties with respect to the accuracy or completeness of the contents of this document, and assumes no liability of any kind, including the implied warranties of noninfringement, merchantability or fitness for purposes, with respect to the operation or use of AMD hardware, software or other products described herein. No license, including implied or arising by estoppel, to any intellectual property rights is granted by this document. Terms and limitations applicable to the purchase or use of AMD's products are as set forth in a signed agreement between the parties or in AMD's Standard Terms and Conditions of Sale.

© Copyright 2023 Advanced Micro Devices, Inc. All rights reserved. Xilinx, the Xilinx logo, AMD, the AMD Arrow logo, Alveo, Artix, Kintex, Kria, Spartan, Versal, Vitis, Virtex, Vivado, Zynq, and other designated brands included herein are trademarks of Advanced Micro Devices, Inc. Other product names used in this publication are for identification purposes only and may be trademarks of their respective companies. AMBA, AMBA Designer, ARM, ARM1176JZ-S, CoreSight, Cortex, and PrimeCell are trademarks of ARM in the EU and other countries. PCle, and PCl Express are trademarks of PCl-SIG and used under license.

Printed in the U.S.A. WW11-9-21

