

## Introduction

The JTAGPPC Controller is a wrapper for the JTAGPPC and JTAGPPC440 FPGA primitives. The JTAGPPC and JTAGPPC440 primitives allow the PowerPC® 405 processor and the PowerPC 440 processor, respectively, to connect to the JTAG chain of the FPGA. For more information about connecting the PPC405 processor to the FPGA JTAG chain, refer to the JTAG Debug Port section of the [PowerPC 405 Processor Block Reference Guide](#). For more information about connecting the PowerPC 440 processor to the FPGA JTAG chain, refer to the JTAG Interface section of [UG200, Embedded Processor Block in Virtex®-5 FPGAs Reference Guide](#).


## Features

- Wrapper for the JTAGPPC and JTAGPPC440 primitives
- Enables the debug port of the PowerPC to be connected to the FPGA JTAG chain
- Can connect up to two PowerPC primitives
- Automatically instantiates and connects second unused PowerPC processor in any dual-PowerPC device

LogiCORE™ Facts		
<b>Core Specifics</b>		
Supported Device Family	See <a href="#">EDK Supported Device Families</a> .	
Version of Core	jtagppc_cntlr	v2.01c
<b>Resources Used</b>		
	Min	Max
Slices	N/A	N/A
LUTs	0	1
FFs	0	0
Block RAMs	0	0
Special Features	In Virtex-4: JTAGPPC In Virtex-5: JTAGPPC440	
<b>Provided with Core</b>		
Documentation	Product Specification	
Design File Formats	VHDL	
Constraints File	N/A	
Verification	N/A	
Instantiation Template	N/A	
Reference Designs	None	
<b>Design Tool Requirements</b>		
Xilinx Implementation Tools	See <a href="#">Tools</a> for requirements.	
Verification		
Simulation		
Synthesis		
<b>Support</b>		
Provided by <a href="#">Xilinx, Inc.</a>		

## Functional Description

The JTAGPPC Controller shown in Figure 1 is a wrapper for the JTAGPPC and JTAGPPC440 FPGA primitives.

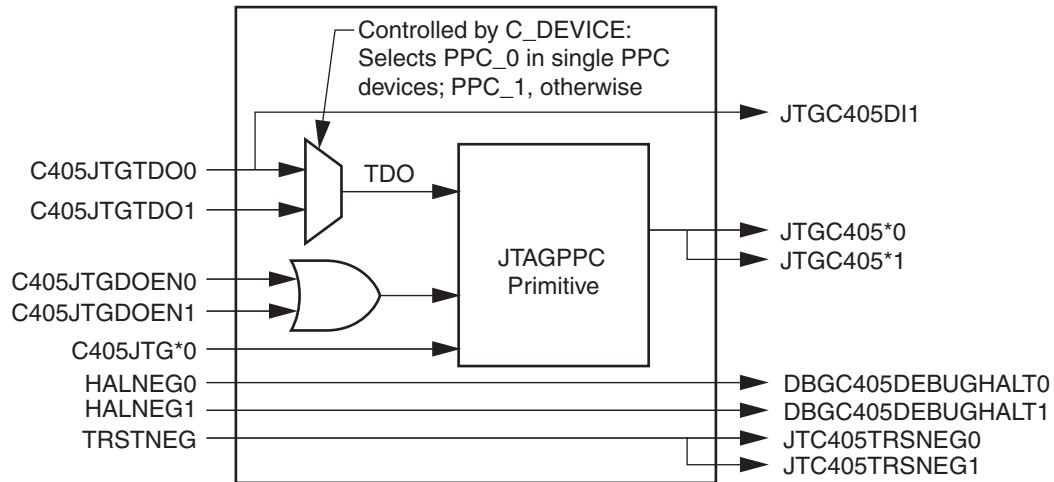

DS298\_01\_031709

Figure 1: JTAGPPC Controller Block Diagram

In FPGA devices containing two PowerPC processor blocks (as listed in Table 2), if the JTAGPPC Controller is used to connect any PowerPC to the FPGA JTAG chain, then the design netlist must instantiate both PowerPC processors and connect both of them to the JTAGPPC Controller, even if the second PowerPC processor instance is unused in the application. Beginning with Version 2.01, the JTAGPPC Controller wrapper automatically instantiates and connects the second unused PowerPC processor if it is not already instantiated in the design.

## JTAGPPC Controller I/O Signals

The I/O signals for the JTAGPPC Controller are listed and described in Table 1. All signals listed in Table 1 are compatible with both the PowerPC 405 and PowerPC 440 processors.

Table 1: JTAGPPC Controller I/O Signals

Signal Name	Interface	I/O	Initial State	Description
TRSTNEG <sup>1</sup>	SYSTEM	I		JTAG Reset signal from user/external logic for all PowerPC processors
HALTNEG0 <sup>1</sup>	SYSTEM	I		Processor Halt signal to first PowerPC
DBG405DEBUGHALT0 <sup>1</sup>	PPC_0	O	HALTNEG0	Halt signal to first PowerPC
C405JTGTDO0 <sup>(1)</sup>	PPC_0	I		JTAG TDO signal from first PowerPC
C405JTGTDOEN0 <sup>1</sup>	PPC_0	I		JTAG TDOEN signal from first PowerPC
JTGC405TRSTNEG0 <sup>1</sup>	PPC_0	O	TRSTNEG	JTAG Reset signal to first PowerPC
JTGC405TCK0 <sup>1</sup>	PPC_0	O	same as primitive	JTAG TCK signal to first PowerPC

Table 1: JTAGPPC Controller I/O Signals (Cont'd)

Signal Name	Interface	I/O	Initial State	Description
JTGC405TDI0 <sup>1</sup>	PPC_0	O	same as primitive	JTAG TDI signal to first PowerPC
JTGC405TMS0 <sup>1</sup>	PPC_0	O	same as primitive	JTAG TMS signal to first PowerPC
HALTNEG1 <sup>2</sup>	SYSTEM	I		Processor Halt signal from user/external logic (Ex: Vision Probe)
DBGC405DEBUGHALT1 <sup>2</sup>	PPC_1	O	HALTNEG1	Halt signal to second PowerPC
C405JTGTD01 <sup>(2)</sup>	PPC_1	I		JTAG TDO signal from second PowerPC
C405JTGTD0EN1 <sup>(2)</sup>	PPC_1	I		JTAG TDOEN signal from second PowerPC
JTGC405TRSTNEG1 <sup>(2)</sup>	PPC_1	O	TRSTNEG	JTAG Reset signal to second PowerPC
JTGC405TCK1 <sup>(2)</sup>	PPC_1	O	same as primitive	JTAG TCK signal to second PowerPC
JTGC405TDI1 <sup>(2)</sup>	PPC_1	O	same as primitive	JTAG TDI signal to second PowerPC
JTGC405TMS1 <sup>(2)</sup>	PPC_1	O	same as primitive	JTAG TMS signal to second PowerPC

1. Must be connected if core is used.
2. Should be left unconnected in designs that do not contain a second PowerPC instance.

## JTAGPPC Controller Parameters

The parameters for the JTAGPPC Controller are listed in [Table 2](#).

Table 2: JTAGPPC Controller Parameters

Parameter Name	Description	Allowed Values	Tool Calculated	Type
C_DEVICE	Target device identifier. Used to determine how many PowerPC primitives exist in the part.	Single PowerPC devices: 4VFX12, 4VFX20, 5VFX30T, 5VFX70T. Dual PowerPC devices: 4VFX40, 4VFX60, 4VFX100, 4VFX140, 5VFX100T, 5VFX115T, 5VFX130T, 5VFX180T.	yes	string

## Allowable Parameter Combinations

There are no restrictions on parameter combinations.

## Parameter - Port Dependencies

When C\_DEVICE indicates a single PowerPC device (as listed in [Table 2](#)), ports DBGC405DEBUGHALT1, C405JTGTD01, C405JTGTD0EN1, JTGC405TRSTNEG1, JTGC405TCK1, JTGC405TDI1 and JTGC405TMS1 must remain unconnected.

When C\_DEVICE indicates a dual PowerPC device (as listed in [Table 2](#)), ports DBGC405DEBUGHALT1, C405JTGTD01, C405JTGTD0EN1, JTGC405TRSTNEG1, JTGC405TCK1, JTGC405TDI1 and JTGC405TMS1 must be connected to the second PowerPC instance only if it is instantiated in the design.

## JTAGPPC Controller Register Descriptions

Not applicable.

## JTAGPPC Controller Interrupt Descriptions

Not applicable.

## Support

Xilinx provides technical support for this LogiCORE product when used as described in the product documentation. Xilinx cannot guarantee timing, functionality, or support of product if implemented in devices that are not defined in the documentation, if customized beyond that allowed in the product documentation, or if changes are made to any section of the design labeled *DO NOT MODIFY*.

## Reference Documents

- *PowerPC 405 Processor Block Reference Guide*
- [UG200](#), *Embedded Processor Block in Virtex-5 FPGAs Reference Guide*

## Revision History

The following table shows the revision history for this document.

Date	Version	Revision
8/12/2008	1.0	Initial Release.
4/24/2009	2.0	Removed support for Virtex-II devices. Replaced references to supported device families and tool names with hyperlink to PDF file.

## Notice of Disclaimer

Xilinx is providing this product documentation, hereinafter "Information," to you "AS IS" with no warranty of any kind, express or implied. Xilinx makes no representation that the Information, or any particular implementation thereof, is free from any claims of infringement. You are responsible for obtaining any rights you may require for any implementation based on the Information. All specifications are subject to change without notice. XILINX EXPRESSLY DISCLAIMS ANY WARRANTY WHATSOEVER WITH RESPECT TO THE ADEQUACY OF THE INFORMATION OR ANY IMPLEMENTATION BASED THEREON, INCLUDING BUT NOT LIMITED TO ANY WARRANTIES OR REPRESENTATIONS THAT THIS IMPLEMENTATION IS FREE FROM CLAIMS OF INFRINGEMENT AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Except as stated herein, none of the Information may be copied, reproduced, distributed, republished, downloaded, displayed, posted, or transmitted in any form or by any means including, but not limited to, electronic, mechanical, photocopying, recording, or otherwise, without the prior written consent of Xilinx.