

Part Number: AT-1220-TT-2-R

Features

Mounting: Thru Hole
Frequency: 2048 +/- 500 Hz
Lead Free Component




Electrical Specifications

Operating Voltage	1 - 3 Vp-p
Rated Current (Max.)	30 mA
Rated Voltage	1.5 Vp-p
Resonant Frequency	2048 +/- 500 Hz
Sound Pressure Level @ 10 cm (Min.)	75 dBA

Case: Noryl
Weight: 2 g
Pin Material: SnBi plated copper
Environmentally friendly, lead free


Mechanical

Dimensions are in millimeters, tolerance is ± 0.5 unless otherwise specified.

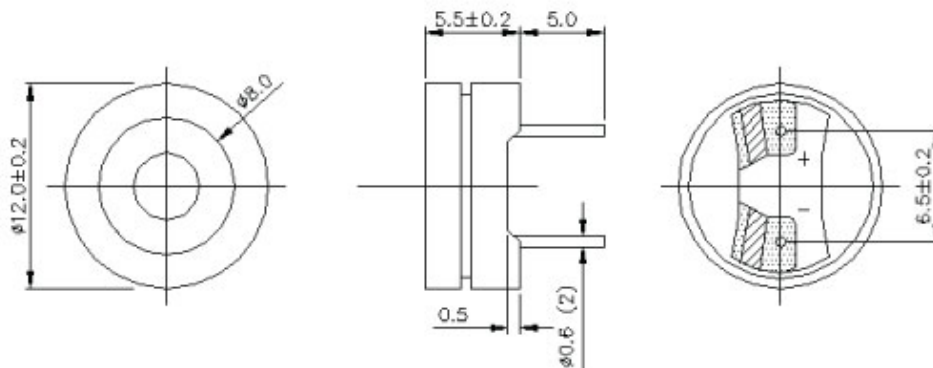

Performance

Typical SPL vs. Frequency

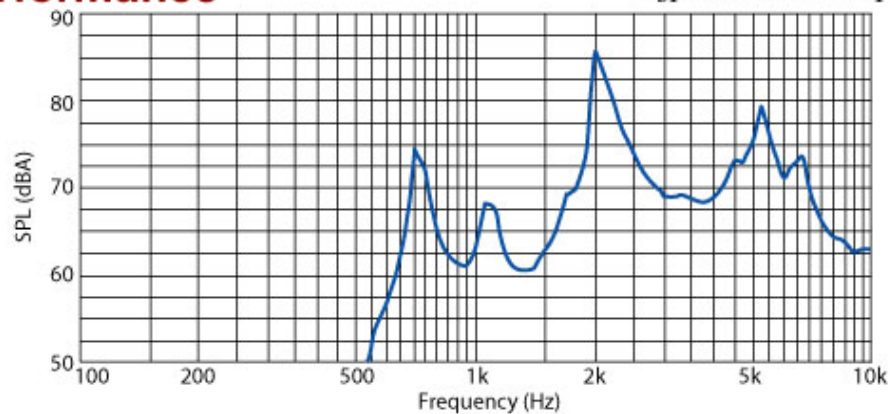

For application notes and detail drawing specifications, please consult www.projectsunlimited.com.

Specifications subject to change without notice.

© 2005, Projects Unlimited Inc., All Rights Reserved.