

## Introduction

The Xilinx® 3GPP LTE MIMO Encoder v3.0 core implements multiple-input, multiple-output (MIMO) encoding for LTE eNodeB applications as defined in the 3GPP TS 36.211 v.9.1 specification [Ref 1]. It represents one IP component in the Xilinx broader LTE Baseband Platform.

## Features

- AXI4-Stream compliant interfaces
- Implements layer mapping and pre-coding as defined in the 3GPP TS 36.211 v.9.1 specification [Ref 1]
- Supports both Transmit Diversity and Spatial Multiplexing encoding schemes
- Cyclic Delay Diversity option
- Supports 2 and 4 antennas
- Maximum theoretical throughput supported for systems with up to 20 MHz bandwidth
- Parameterizable input/output data precision

- Optimized for Xilinx high performance Virtex®-6 FPGAs

## Applications

The 3GPP LTE MIMO Encoder v3.0 can be used for the following applications:

- Base station applications implementing eNodeB following the LTE specification [Ref 1]. The LTE MIMO Encoder v3.0 can perform the MIMO-encoding functions for downlink transmission.
- Applications that use any of the downlink MIMO-encoding schemes of the LTE specification [Ref 1].

## Theory of Operation

The LTE MIMO Encoder is to be part of the eNodeB, the downlink baseband processing that encompasses layer mapping and pre-coding as defined in [Ref 1]. Figure 1 shows a high-level view of the functionality included in this product.

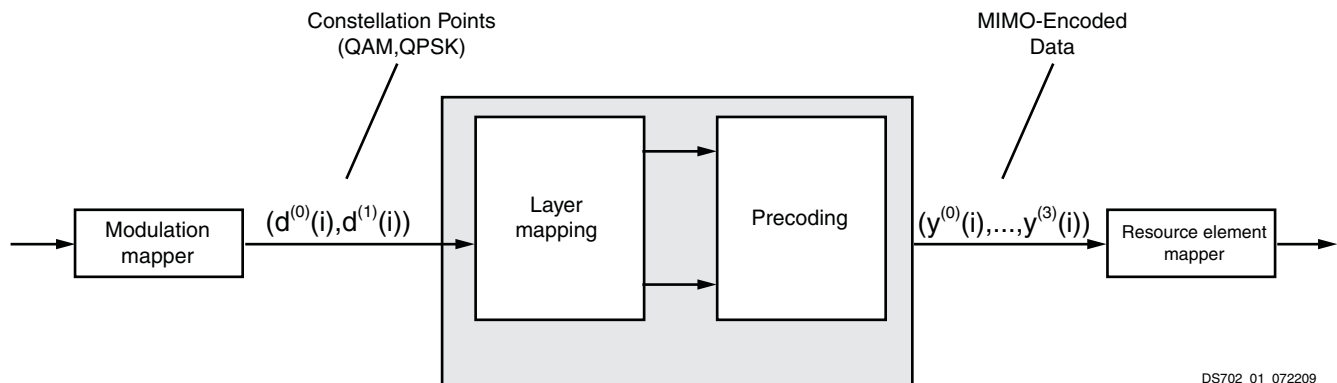


Figure 1: LTE MIMO Encoder v3.0 Functionality

DS702\_01\_072209

## C Model

The LTE 3GPP MIMO Encoder core has a bit-accurate C model designed for system modeling. The model is bit-accurate but not cycle-accurate, so it produces exactly the same output data as the core on a code-word by code-word basis. However, it does not model the core latency or interface signals.

The bit accurate behavioral C model of the LTE MIMO Encoder v3.0 and associated user guide are available to customers. The C model is provided as a dynamically linked library for Windows 32-bit and 64-bit Linux platforms. A README.txt file describes the contents of the installed directory structure and any further platform-specific installation instructions.

## Additional Documentation and Supporting Materials

A full data sheet and additional supporting materials (C models and accompanying user guide documentation) are available for this core. Access to this material may be requested by clicking on this registration link: [www.xilinx.com/member/lte\\_mimo\\_enc\\_eval/index.htm](http://www.xilinx.com/member/lte_mimo_enc_eval/index.htm).

## References

1. Third Generation Partnership Projects (3GPP); Evolved Universal Radio Access (E-UTRA); Physical Channels and Modulation (Release 9), 3GPP TS 36.211 V9.1.0 (2010-03).

## Support

Xilinx provides technical support at [www.xilinx.com/support](http://www.xilinx.com/support) for this LogiCORE™ IP product when used as described in the product documentation. Xilinx cannot guarantee timing, functionality, or support of product if implemented in devices that are not defined in the documentation, if customized beyond that allowed in the product documentation, or if changes are made to any section of the design labeled DO NOT MODIFY.

Refer to the IP Release Notes Guide ([XTP025](#)) for more information on this core. There will be a link to all DSP IP and then to the relevant core. For each core, there is a master Answer Record that contains the Release Notes and Known Issues list for the core being used. The following information is listed for each version of the core:

- New Features
- Bug Fixes
- Known Issues

## Ordering Information

This Xilinx LogiCORE IP module is provided under the terms of the [Xilinx Core Site License](#) and the core is generated using the Xilinx ISE CORE Generator software. The CORE Generator software is shipped with the Xilinx ISE Design Suite software.

For full access to all core functionality in simulation and in hardware, you must purchase a license for the core. Please contact your local Xilinx sales representative for information on pricing and availability of Xilinx LogiCORE IP modules. Information about additional modules is also available at the [Xilinx IP Center](#).

## Revision History

The following table shows the revision history for this document:

Date	Version	Description of Revisions
11/17/08	1.0	Xilinx initial release.
09/16/09	2.0	Updated for core version 2.0.
08/15/11	2.1	Updated to include web registration information.
01/18/12	3.0	Added a reference to 3GPP and updated Features section for core version 3.0.

## Notice of Disclaimer

The information disclosed to you hereunder (the “Materials”) is provided solely for the selection and use of Xilinx products. To the maximum extent permitted by applicable law: (1) Materials are made available “AS IS” and with all faults, Xilinx hereby DISCLAIMS ALL WARRANTIES AND CONDITIONS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, OR FITNESS FOR ANY PARTICULAR PURPOSE; and (2) Xilinx shall not be liable (whether in contract or tort, including negligence, or under any other theory of liability) for any loss or damage of any kind or nature related to, arising under, or in connection with, the Materials (including your use of the Materials), including for any direct, indirect, special, incidental, or consequential loss or damage (including loss of data, profits, goodwill, or any type of loss or damage suffered as a result of any action brought by a third party) even if such damage or loss was reasonably foreseeable or Xilinx had been advised of the possibility of the same. Xilinx assumes no obligation to correct any errors contained in the Materials or to notify you of updates to the Materials or to product specifications. You may not reproduce, modify, distribute, or publicly display the Materials without prior written consent. Certain products are subject to the terms and conditions of the Limited Warranties which can be viewed at <http://www.xilinx.com/warranty.htm>; IP cores may be subject to warranty and support terms contained in a license issued to you by Xilinx. Xilinx products are not designed or intended to be fail-safe or for use in any application requiring fail-safe performance; you assume sole risk and liability for use of Xilinx products in Critical Applications: <http://www.xilinx.com/warranty.htm#critapps>.