


Ceramic Brazed (CB228) Package

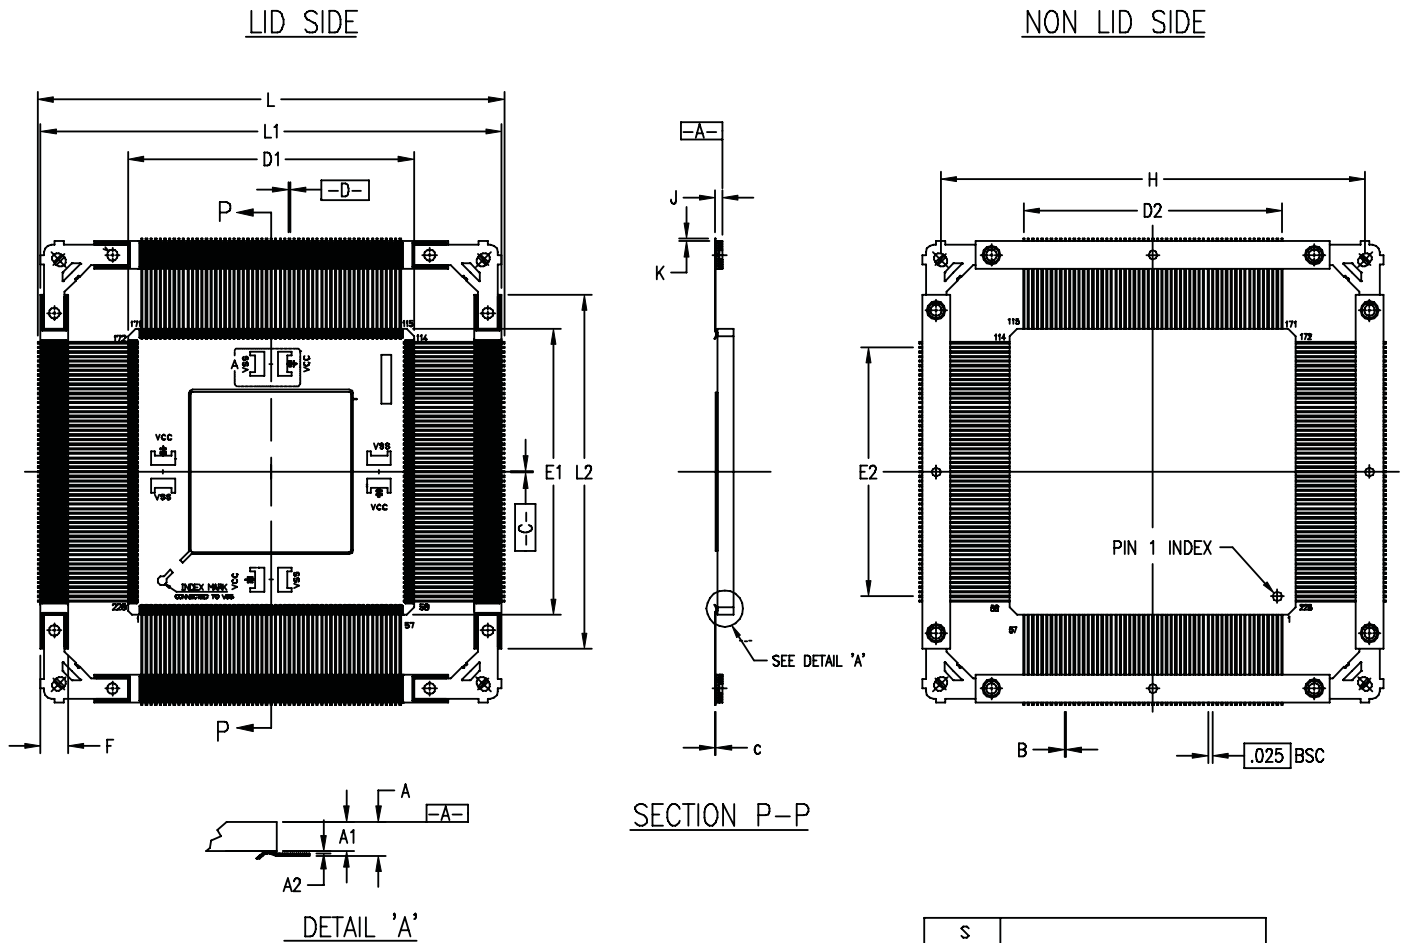

NOTES:

1. ALL DIMENSIONING AND TOLERANCING CONFORM TO ANSI Y14.5M-1982
2. PACKAGES ARE SHIPPED UNFORMED.
3. LEAD FINISH: GOLD (50 MICROINCHES MINIMUM) OVER NICKEL PER MIL-I-38535

SYMBOL	INCHES		
	MIN.	NOM.	MAX.
A	<i>h</i>	<i>h</i>	.130
A1	<i>h</i>	<i>h</i>	.110
A2	<i>h</i>	<i>h</i>	.020
B	.007	<i>h</i>	.012
C	.005	.006	.009
D1/E1	1.534	1.550	1.570
D2/E2	1.400 BSC		
F	.125	.150	.175
H	2.300 BSC		
J	.030	.035	.040
K	<i>h</i>	<i>h</i>	.020
L	<i>h</i>	<i>h</i>	2.580
L1	2.480	2.500	2.530
L2	1.900	1.920	1.940

228-PIN CERAMIC BRAZED (CB228)

Revision History

The following table shows the revision history for this document.

Date	Version	Revision
10/11/94	1.0	Initial Release
05/05/08	1.0.1	Minor editorial updates.