


SYMBOL	MILLIMETERS		
	MIN.	NOM.	MAX.
A	--	--	1.19
A ₁	0.05	0.10	0.15
A ₂	0.79	--	1.04
B	0.18	--	0.30
C	0.10	--	0.20
D	6.40	6.50	6.60
E	4.29	4.39	4.47
e	0.65 BSC		
H	6.20	6.40	6.60
L	0.50	0.60	0.75
α	0°	5°	8°

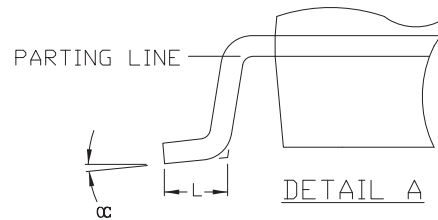

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M-1982.
2. DIMENSION "D" DOES NOT INCLUDE MOLD PROTRUSION. ALLOWABLE MOLD PROTRUSION SHALL NOT EXCEED 0.15mm PER SIDE.
3. DIMENSION "E" DOES NOT INCLUDE MOLD PROTRUSION. ALLOWABLE MOLD PROTRUSION SHALL NOT EXCEED 0.25mm PER SIDE.
4. LEAD FINISH: VO20 - 85/15 (Sn/Pb)
VOG20 - 100% Matte Sn
5. CONFORMS TO JEDEC MO-153-AC

20 LEAD TSOP (VO20/VOG20)

Revision History

The following table shows the revision history for this document.

Date	Version	Revision
12/12/08	1.3	Revised the dimensions from inches to millimeters.