

Virtex-7 FPGA VC7203 Characterization Kit IBERT

Getting Started Guide

Vivado Design Suite 2013.2

UG847 (v3.0) July 10, 2013



NOTICE OF DISCLAIMER

The information disclosed to you hereunder (the “Materials”) is provided solely for the selection and use of Xilinx products. To the maximum extent permitted by applicable law: (1) Materials are made available “AS IS” and with all faults, Xilinx hereby DISCLAIMS ALL WARRANTIES AND CONDITIONS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT, OR FITNESS FOR ANY PARTICULAR PURPOSE; and (2) Xilinx shall not be liable (whether in contract or tort, including negligence, or under any other theory of liability) for any loss or damage of any kind or nature related to, arising under, or in connection with, the Materials (including your use of the Materials), including for any direct, indirect, special, incidental, or consequential loss or damage (including loss of data, profits, goodwill, or any type of loss or damage suffered as a result of any action brought by a third party) even if such damage or loss was reasonably foreseeable or Xilinx had been advised of the possibility of the same. Xilinx assumes no obligation to correct any errors contained in the Materials, or to advise you of any corrections or update. You may not reproduce, modify, distribute, or publicly display the Materials without prior written consent. Certain products are subject to the terms and conditions of the Limited Warranties which can be viewed at <http://www.xilinx.com/warranty.htm>; IP cores may be subject to warranty and support terms contained in a license issued to you by Xilinx. Xilinx products are not designed or intended to be fail-safe or for use in any application requiring fail-safe performance; you assume sole risk and liability for use of Xilinx products in Critical Applications: <http://www.xilinx.com/warranty.htm#critapps>.

© Copyright 2012, 2013 Xilinx, Inc. Xilinx, the Xilinx logo, Artix, ISE, Kintex, Spartan, Virtex, Vivado, Zynq, and other designated brands included herein are trademarks of Xilinx in the United States and other countries. All other trademarks are the property of their respective owners.

Revision History

The following table shows the revision history for this document.

Date	Version	Revision
11/07/2012	1.0	Initial Xilinx release.
01/23/2013	2.0	Updated for ISE® Design Suite 14.4 and Vivado® Design Suite 2012.4.
07/10/2013	3.0	Updated for Vivado Design Suite 2013.2. Updated Extracting the Project Files, page 7 , Launching the Vivado Design Suite Software, page 14 , Starting the SuperClock-2 Module, page 16 , and Creating the GTX IBERT Core, page 26 for the latest procedures.

Table of Contents

Revision History	2
Chapter 1: VC7203 IBERT Getting Started Guide	
Overview	5
Requirements	6
Setting Up the VC7203 Board	6
Extracting the Project Files	7
Running the GTX IBERT Demonstration	7
Connecting the GTX Transceivers and Reference Clocks	7
Attach the GTX Quad Connector	9
GTX Transceiver Clock Connections	10
GTX TX/RX Loopback Connections	11
Configuring the FPGA	12
Launching the Vivado Design Suite Software	14
Starting the SuperClock-2 Module	16
Viewing GTX Transceiver Operation	22
Closing the IBERT Demonstration	23
SuperClock-2 Frequency Table	23
Creating the GTX IBERT Core	26
Appendix A: Additional Resources	
Xilinx Resources	43
Solution Centers	43
Further Resources	43
Appendix B: Warranty	

Chapter 1

VC7203 IBERT Getting Started Guide

Overview

This document provides a procedure for setting up the VC7203 Virtex®-7 FPGA GTX Transceiver Characterization Board to run the Integrated Bit Error Ratio Test (IBERT) demonstration using the Vivado® Design Suite. The designs that are required to run the IBERT demonstration are stored in a Secure Digital (SD) memory card that is provided with the VC7203 board. The demonstration shows the capabilities of the Virtex-7 XC7V485T FPGA GTX transceiver.

The VC7203 board is described in detail in *VC7203 Virtex-7 FPGA GTX Transceiver Characterization Board User Guide* ([UG957](#)).

The IBERT demonstrations operate one GTX Quad at a time. The procedure consists of:

1. [Setting Up the VC7203 Board](#)
2. [Extracting the Project Files](#)
3. [Connecting the GTX Transceivers and Reference Clocks](#)
4. [Configuring the FPGA](#)
5. [Launching the Vivado Design Suite Software](#)
6. [Starting the SuperClock-2 Module](#)
7. [Viewing GTX Transceiver Operation](#)
8. [Closing the IBERT Demonstration](#)

Requirements

The hardware and software required to run the GTX IBERT demonstrations are:

- VC7203 Virtex-7 FPGA GTX Transceiver Characterization Board including:
 - One SD card containing the IBERT demonstration designs
 - One Samtec BullsEye cable
 - Eight SMA female-to-female (F-F) adapters
 - Six 50Ω SMA terminators
 - GTX transceiver power supply module (installed on board)
 - SuperClock-2 module, Rev 1.0 (installed on board)
 - 12V DC power adapter
 - USB cable, standard-A plug to Micro-B plug
- Host PC with:
 - SD card reader
 - USB ports
- Xilinx Vivado Design Suite software, version 2013.2 or higher

The hardware and software required to rebuild the IBERT demonstration designs are:

- Xilinx Vivado Design Suite version 2013.2 or higher
- PC with a version of the Windows operating system supported by Xilinx Vivado Design Suite

Setting Up the VC7203 Board

This section describes how to set up the VC7203 board.

Caution! The VC7203 board can be damaged by electrostatic discharge (ESD). Follow standard ESD prevention measures when handling the board.

When the VC7203 board ships from the factory, it is configured for the GTX IBERT demonstrations described in this document. If the board has been re-configured it must be returned to the default set-up before running the IBERT demonstrations.

1. Move all jumpers and switches to their default positions. The default jumper and switch positions are listed in *VC7203 Virtex-7 FPGA GTX Transceiver Characterization Board User Guide* ([UG957](#)).
2. Install the GTX transceiver power module by plugging it into connectors J66 and J97.
3. Install the SuperClock-2 module:
 - a. Align the three metal standoffs on the bottom side of the module with the three mounting holes in the SUPERCLOCK-2 MODULE interface of the VC7203 board.
 - b. Using three 4-40 x 0.25 inch screws, firmly screw down the module from the bottom of the VC7203 board.
 - c. On the SuperClock-2 module, place a jumper across pins 2–3 (2V5) of the CONTROL VOLTAGE header, J18, and place another jumper across Si570 INH header J11.
 - d. Screw down a 50Ω SMA terminator onto each of the six unused Si5368 clock output SMA connectors: J7, J8, J12, J15, J16 and J17.

Extracting the Project Files

The Vivado project files required to run the IBERT demonstrations are located in `vc7203_ibert.zip` on the SD card provided with the VC7203 board. They are also available online (as collection `rdf0272_2013_2.zip`) at:

www.xilinx.com/vc7203

The ZIP collection also contains two Tcl scripts: `add_scm2.tcl` and `setup_scm2_156_25.tcl`, and seven Vivado probe files: `vc7203_q113.ltx`, `vc7203_q114.ltx`, `vc7203_q115.ltx`, `vc7203_q116.ltx`, `vc7203_q117.ltx`, `vc7203_q118.ltx`, and `vc7203_q119.ltx`. The Tcl scripts are used to help merge the IBERT and SuperClock-2 source code (described in [Creating the GTX IBERT Core, page 26](#)) and to set up the SuperClock-2 module to run at 156.25 MHz (described in [Launching the Vivado Design Suite Software, page 14](#)). The debug probes are used by Vivado design tools to properly load the SuperClock-2 VIO core.

To copy the files from the Secure Digital memory card:

1. Connect the Secure Digital memory card to the host computer.
2. Locate the file `vc7203_ibert.zip` on the Secure Digital memory card.
3. Unzip the files to a working directory on the host computer.


Running the GTX IBERT Demonstration

The GTX IBERT demonstration operates one GTX Quad at a time. This section describes how to test GTX Quad 115. The remaining GTX Quads are tested following a similar series of steps.

Connecting the GTX Transceivers and Reference Clocks

[Figure 1-1](#) shows the locations for GTX transceiver Quads 115, 116, 117, and 118 on the VC7203 board.

Note: [Figure 1-1](#) is for reference only and might not reflect the current revision of the board.

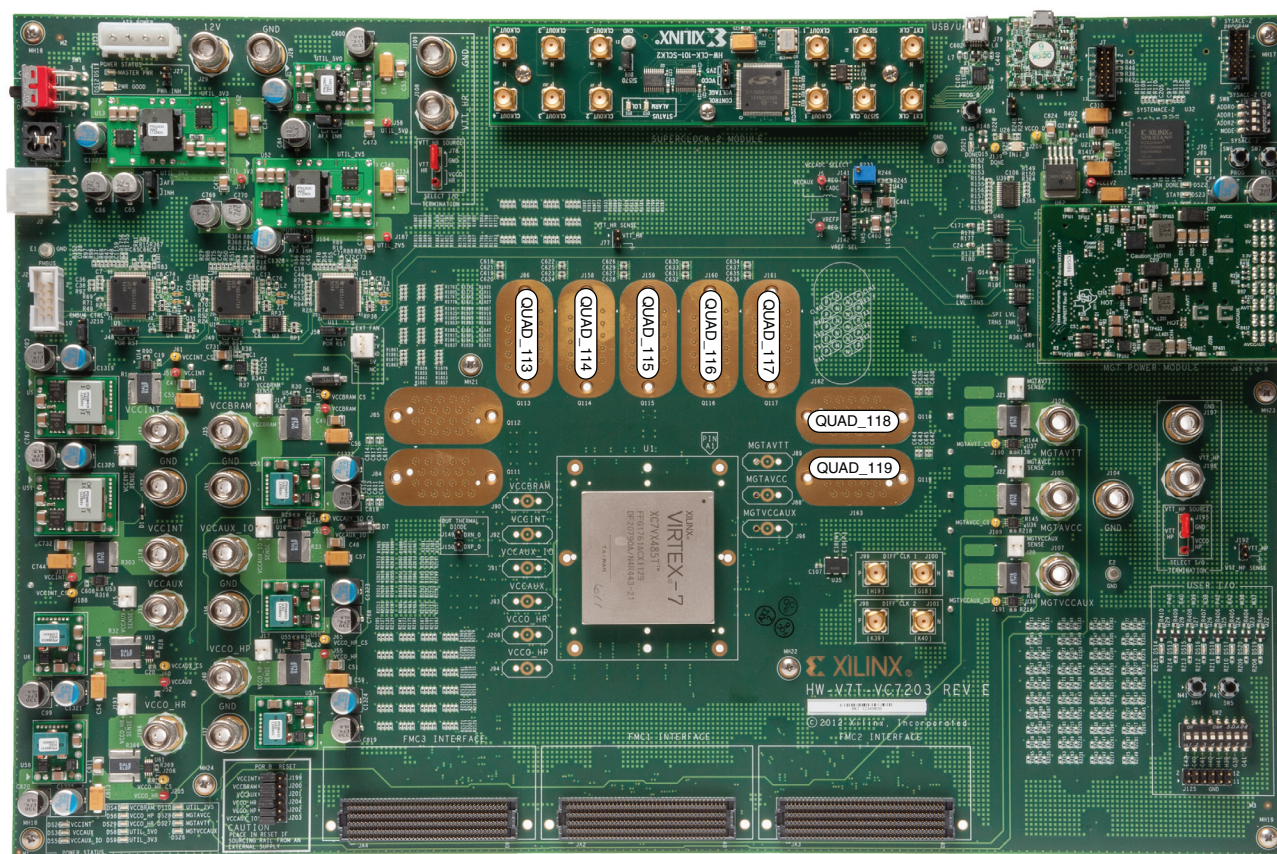

UG847_c1_01_1026112

Figure 1-1: GTX Quad Locations

All GTX transceiver pins and reference clock pins are routed from the FPGA to a connector pad which interfaces with Samtec BullsEye connectors. [Figure 1-2 A](#) shows the connector pad. [Figure 1-2 B](#) shows the connector pinout.

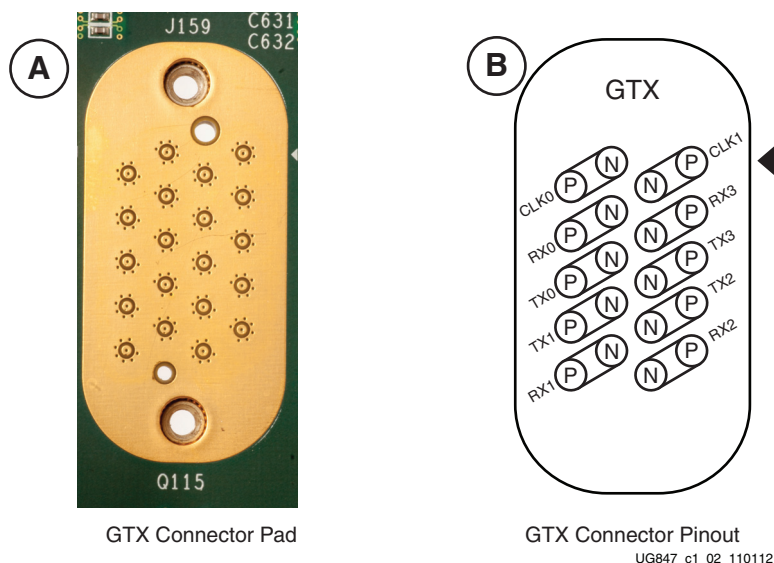


Figure 1-2: A – GTX Connector Pad. B – GTX Connector Pinout

The SuperClock-2 module provides LVDS clock outputs for the GTX transceiver reference clocks in the IBERT demonstrations. Figure 1-3 shows the locations of the differential clock SMA connectors on the clock module which can be connected to the reference clock cables.

Note: The image in Figure 1-3 is for reference only and might not reflect the current revision of the board.

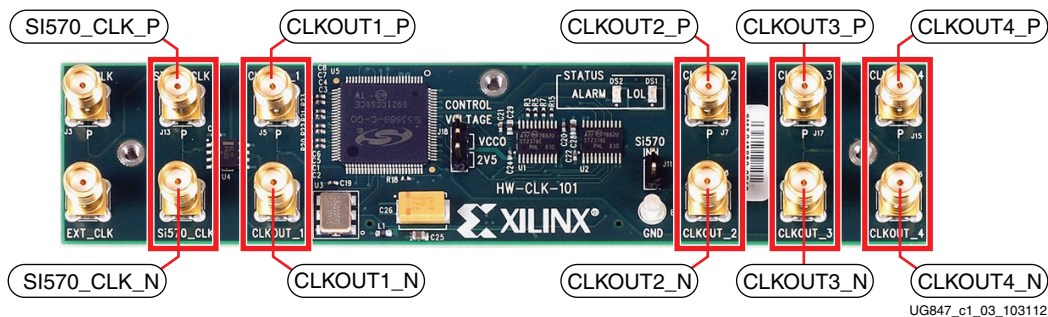


Figure 1-3: SuperClock-2 Module Output Clock SMA Locations

The four SMA pairs labeled CLKOUT provide LVDS clock outputs from the Si5368 clock multiplier/jitter attenuator device on the clock module. The SMA pair labeled Si570_CLK provides LVDS clock output from the Si570 programmable oscillator on the clock module.

Note: The Si570 oscillator does not support LVDS output on the Rev B and earlier revisions of the SuperClock-2 module.


For the GTX IBERT demonstration, the output clock frequencies are preset to 156.25 MHz. For more information regarding the SuperClock-2 module, see *HW-CLK-101-SCLK2 SuperClock-2 Module User Guide* (UG770).

Attach the GTX Quad Connector

Before connecting the BullsEye cable assembly to the board, firmly secure the blue elastomer seal provided with the cable assembly to the bottom of the connector housing if

it is not already inserted (see [Figure 1-4](#)).


Note: [Figure 1-4](#) is for reference only and might not reflect the current version of the connector.

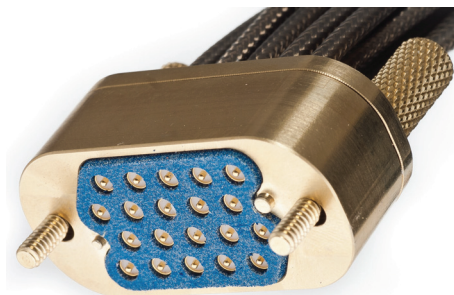

UG847_c1_04_1013112

Figure 1-4: BullsEye Connector with Elastomer Seal

Attach the Samtec BullsEye connector to GTX Quad 115 ([Figure 1-5](#)), aligning the two indexing pins on the bottom of the connector with the guide holes on the board. Hold the connector flush with the board and fasten it by tightening the two captive screws.

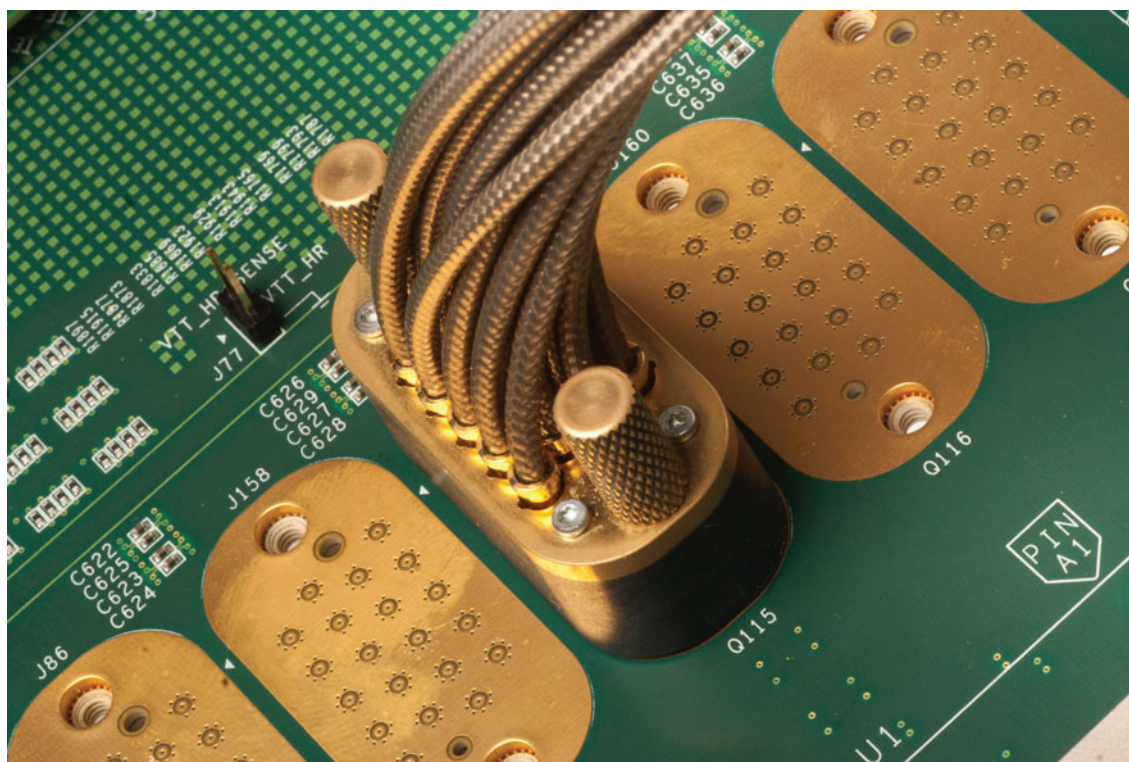

UG847_c1_05_10312

Figure 1-5: BullsEye Connector Attached to Quad 115

GTX Transceiver Clock Connections

See [Figure 1-2, page 9](#) to identify the P and N coax cables that are connected to the CLK1 reference clock inputs. Connect these cables to the SuperClock-2 module as follows:

- CLK1_P coax cable → SMA connector J5 (CLKOUT1_P) on the SuperClock-2 module

- CLK1_N coax cable → SMA connector J6 (CLKOUT1_N) on the SuperClock-2 module

Note: Any one of the five differential outputs from the SuperClock-2 module can be used to source the GTX reference clock. CLKOUT1_P and CLKOUT1_N are used here as an example.

GTX TX/RX Loopback Connections

See [Figure 1-2, page 9](#) to identify the P and N coax cables that are connected to the four receivers (RX0, RX1, RX2 and RX3) and the four transmitters (TX0, TX1, TX2 and TX3). Use eight SMA female-to-female (F-F) adapters ([Figure 1-6](#)), to connect the transmit and receive cables as shown in [Figure 1-7](#) and detailed here:

- TX0_P → SMA F-F Adapter → RX0_P
- TX0_N → SMA F-F Adapter → RX0_N
- TX1_P → SMA F-F Adapter → RX1_P
- TX1_N → SMA F-F Adapter → RX1_N
- TX2_P → SMA F-F Adapter → RX2_P
- TX2_N → SMA F-F Adapter → RX2_N
- TX3_P → SMA F-F Adapter → RX3_P
- TX3_N → SMA F-F Adapter → RX3_N

Note: To ensure good connectivity, it is recommended that the adapters be secured with a wrench; however, do not over tighten the SMAs.



Figure 1-6: SMA F-F Adapter


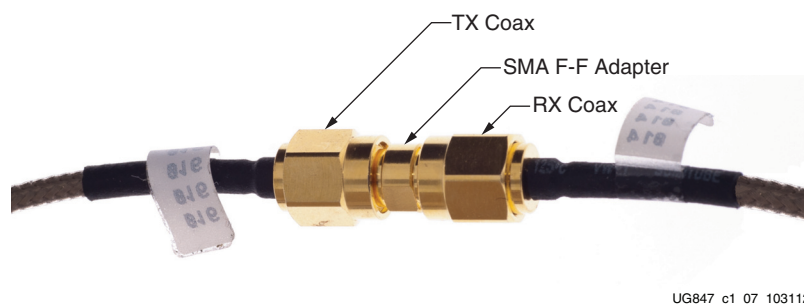


Figure 1-7: TX-To-RX Loopback Connection Example

[Figure 1-8](#) shows the VC7203 board with the cable connections required for the Quad 115 GTX IBERT demonstration.

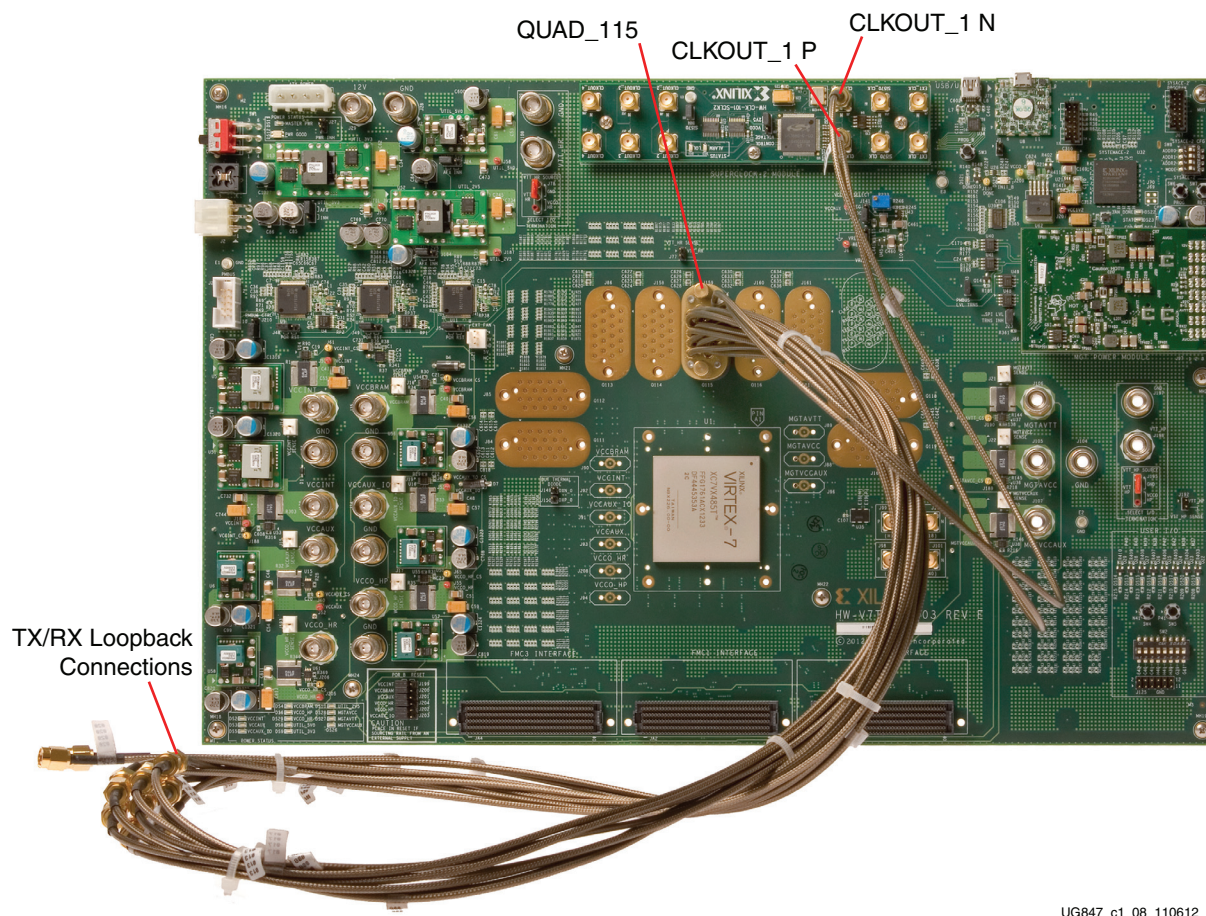

UG847_c1_08_110612

Figure 1-8: Cable Connections for Quad 115 GTX IBERT Demonstration

Configuring the FPGA

This section describes how to configure the FPGA using the SD card included with the board. The FPGA can also be configured through the Vivado Design Suite software using the .bit files and .ltx probe files which are available online (as collection rdf0272_2013_2.zip) at:

www.xilinx.com/vc7203

To configure from the SD card:

1. Insert the SD card provided with the VC7203 board into the SD card reader slot located on the bottom-side (upper-right corner) of the VC7203 board.
2. Plug the 12V output from the power adapter into connector J2 on the VC7203 board.
3. Connect the host computer to the VC7203 board using a standard-A plug to Micro-B plug USB cable. The standard-A plug connects to a USB port on the host computer and the Micro-B plug connects to U8, the Digilent USB JTAG configuration port on the VC7203 board.
4. Select the GTX IBERT demonstration with the System ACE™ SD controller SYSACE-2 CFG switch, SW8. The setting on this 4-bit DIP switch ([Figure 1-9](#)) selects the file used to configure the FPGA. A switch is in the ON position if set to the far right and in the OFF position if set to the far left. For the Quad 115 GTX IBERT demonstration, set

ADR2 = ON, ADR1 = OFF, and ADR0 = ON. The MODE bit (switch position 4) is not used and can be set either ON or OFF.

5. Place the main power switch SW1 to the ON position.



Figure 1-9: Configuration Address DIP Switch (SW8)


There is one IBERT demonstration design for each GTX Quad on the VC7203 board, for a total of seven IBERT designs. An additional design is provided to demonstrate the USB/UART interface (details of this demonstration are described in the README file on the SD card). All eight designs are organized and stored on the SD card as shown in Table 1-1.

Table 1-1: SD Card Contents and Configuration Addresses

Demonstration Design	ADR2	ADR1	ADR0
GTX Quad 113	ON	ON	ON
GTX Quad 114	ON	ON	OFF
GTX Quad 115	ON	OFF	ON
GTX Quad 116	ON	OFF	OFF
GTX Quad 117	OFF	ON	ON
GTX Quad 118	OFF	ON	OFF
GTX Quad 119	OFF	OFF	ON
USB/UART	OFF	OFF	OFF

Launching the Vivado Design Suite Software

1. Start Vivado Design Suite on the host computer and click **File > Open Hardware Session** (highlighted in [Figure 1-10](#)).

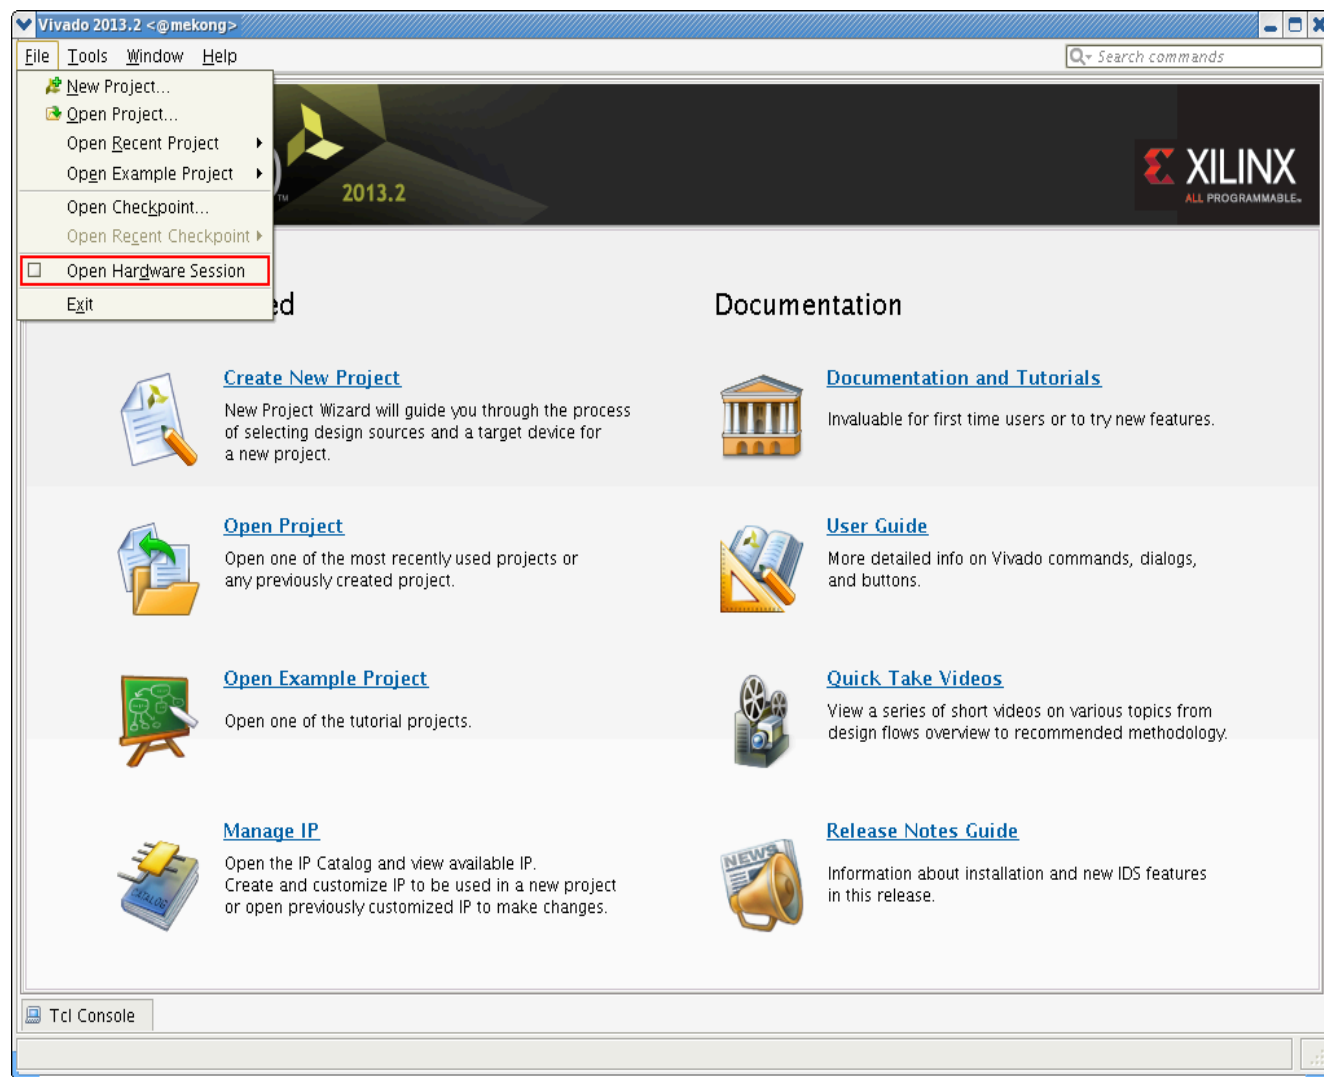

UG847_c1_10_052413

Figure 1-10: Vivado Design Suite, Open Hardware Session

2. In the Hardware Session window, click **Open a new hardware target** (highlighted in Figure 1-11).


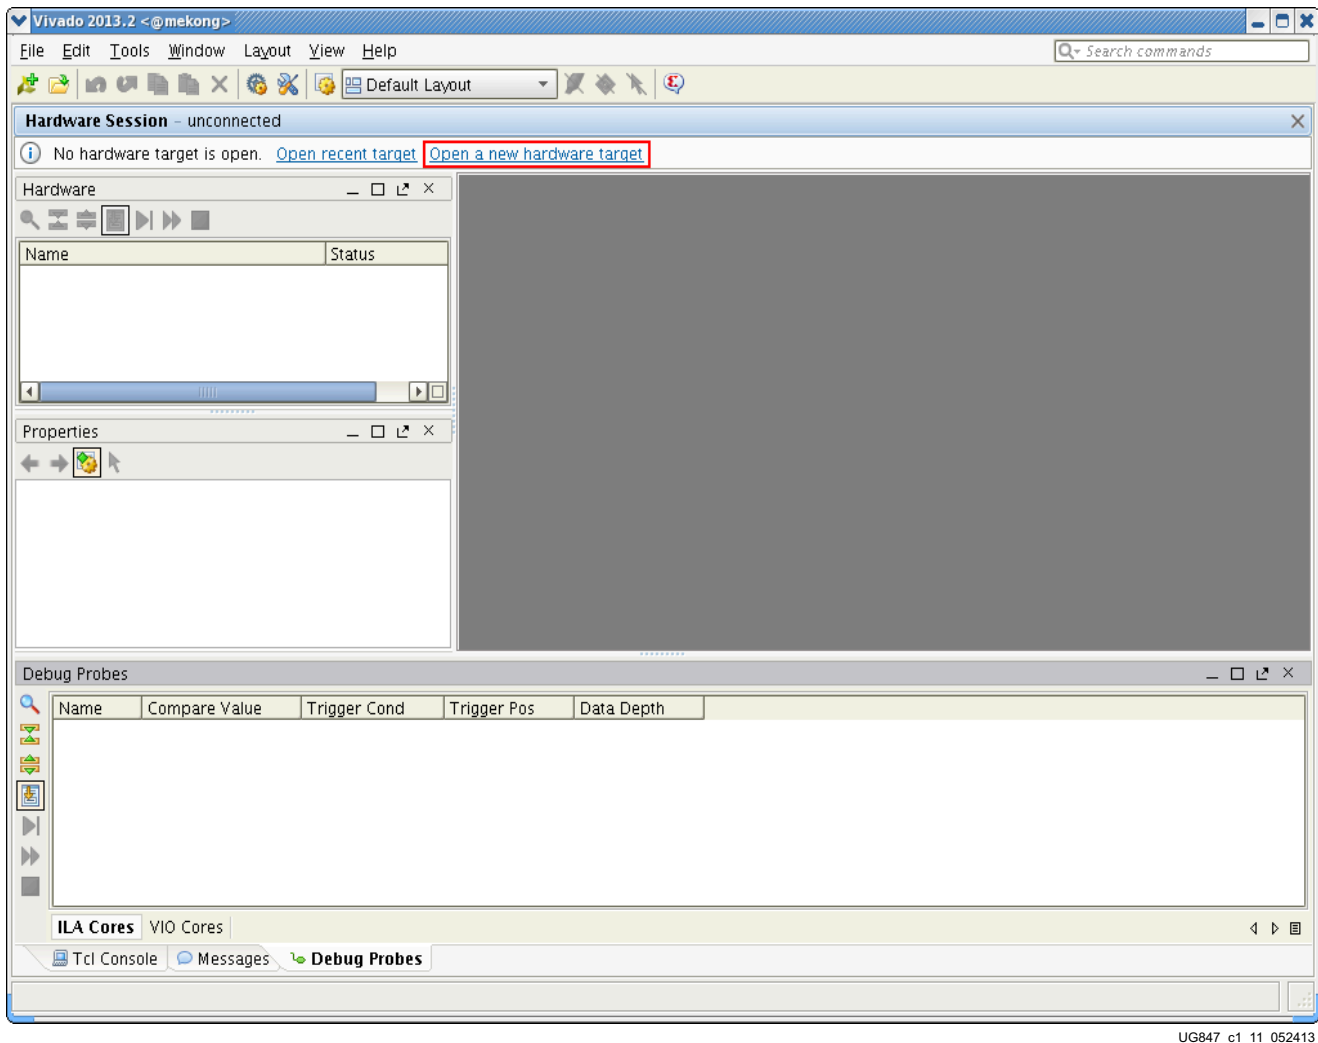


Figure 1-11: Open a New Hardware Target

3. An Open Hardware Target wizard pops up. Click **Next** on the first window.
4. In the Vivado CSE Server Name window, make sure **localhost:60001** is entered for the Server name. Click **Next** and it opens the server to connect to the Digilent JTAG cable.
5. In the Select Hardware Target window, the Digilent cable appears under Hardware Targets and the JTAG chain contents of the selected cable under Hardware Devices (Figure 1-12). Select **digilent_plugin** and click **Next**.

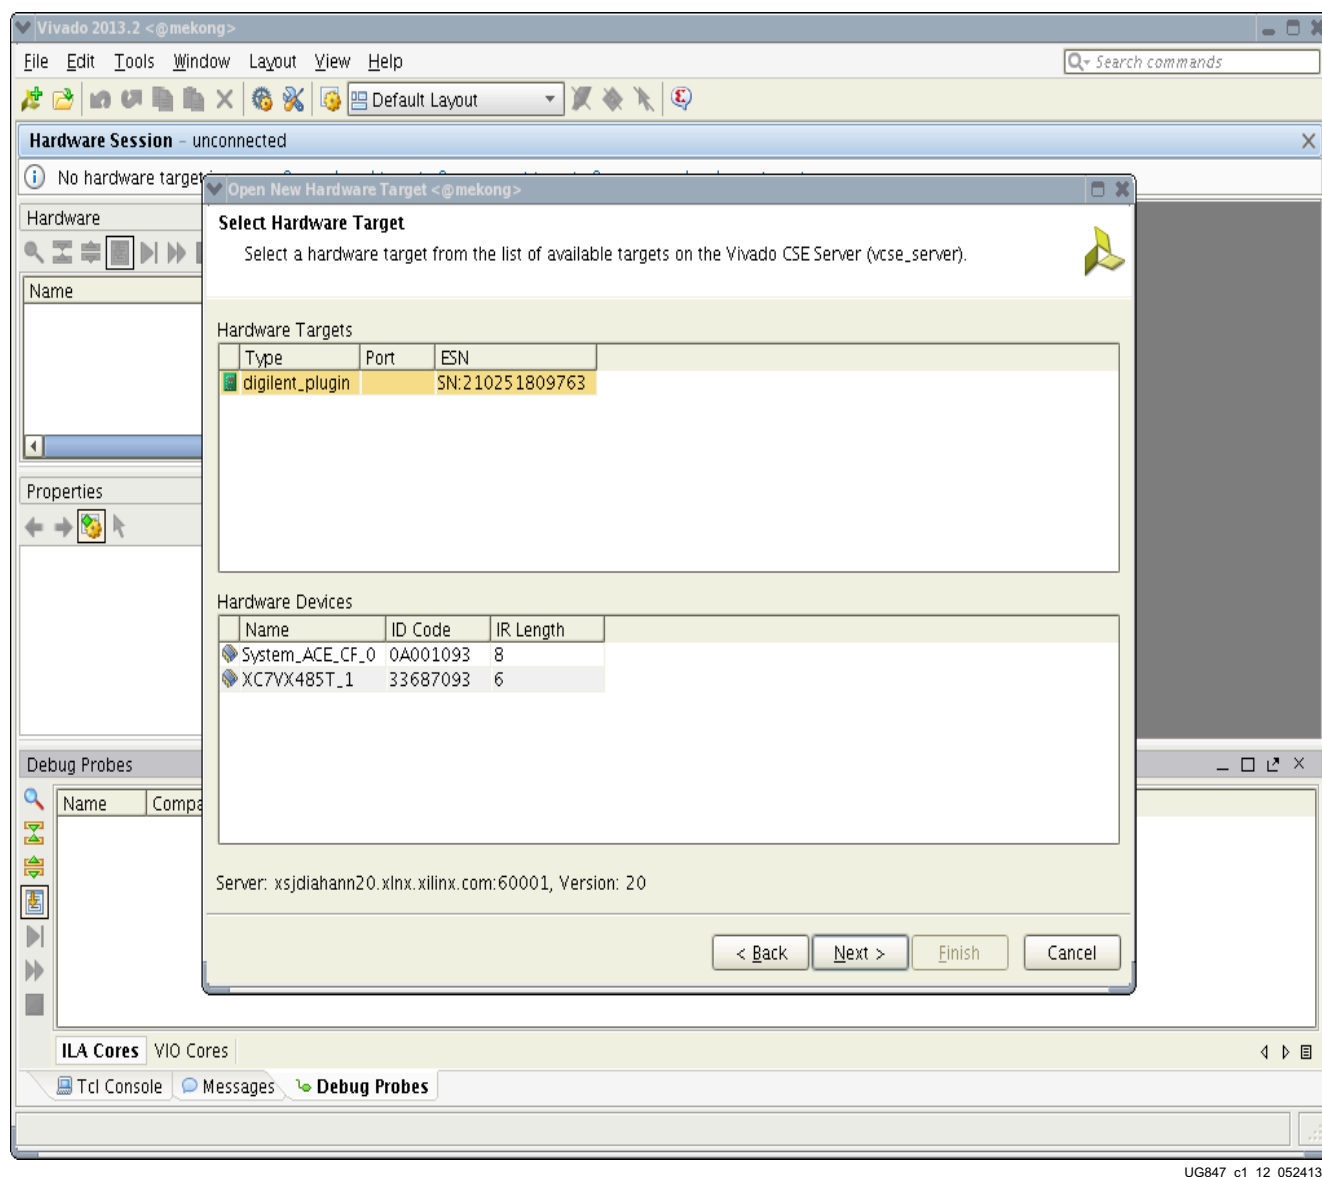

UG847_c1_12_052413

Figure 1-12: Select Hardware Target

6. In the Set Hardware Target Properties window, leave the defaults and click **Next**. In the Open Hardware Target Summary window, click **Finish**. The wizard closes and the Vivado tool opens the hardware target.

Starting the SuperClock-2 Module

The IBERT demonstration designs use an integrated VIO core to control the clocks on the SuperClock-2 module. The SuperClock-2 module features two clock-source components:

- 1) An always-on Si570 crystal oscillator and,
- 2) an Si5368 jitter-attenuating clock multiplier.

Outputs from either device can be used to drive the transceiver reference clocks.

To start the SuperClock-2 module:

1. The Hardware window shows the System ACE and the XC7VX485T device and reports that it is programmed. Select **XC7VX485T_1**. In the Hardware Device Properties window, enter the file path to the Probes file associated with the Q115 IBERT design (vc7203_q115.1.ttx) (Figure 1-14).


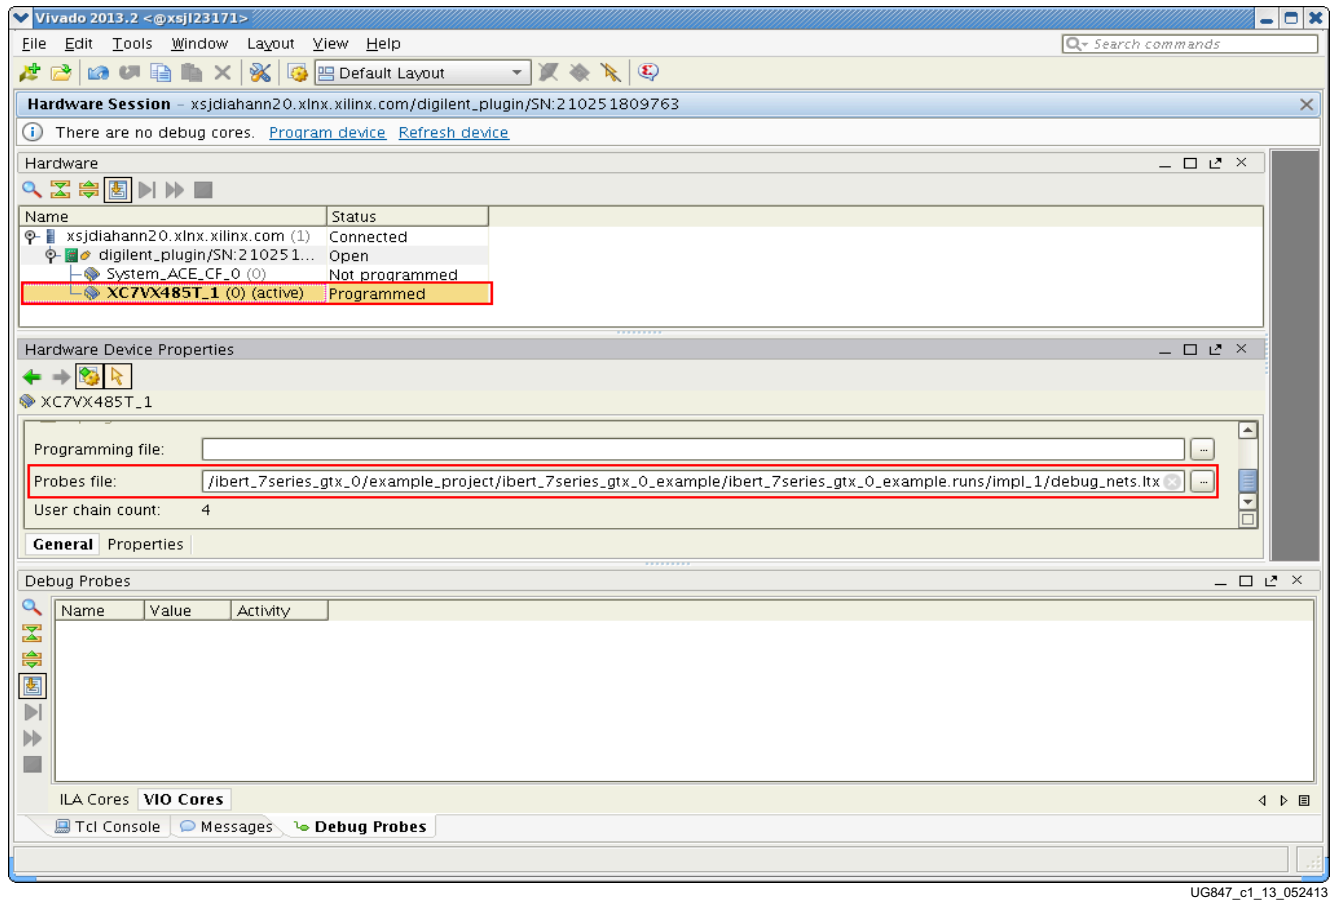


Figure 1-13: Adding the Probes File


2. In the Hardware window, right-click **XC7VX485T_1** and select **Refresh Device** (Figure 1-14).

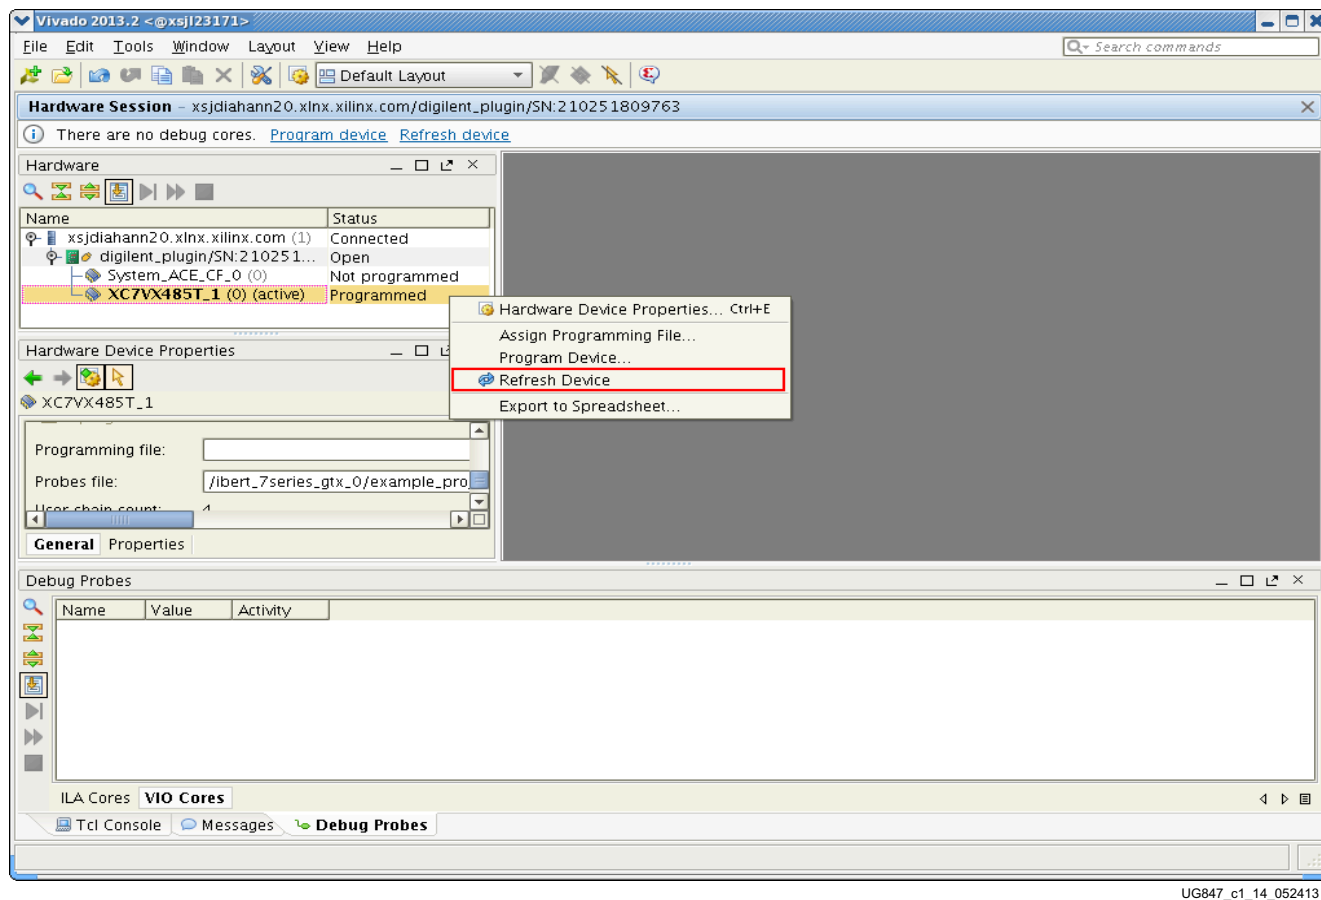

UG847_c1_14_052413

Figure 1-14: Refresh Device

3. The Vivado tool now shows the SuperClock-2 VIO core and the IBERT core. To configure the SuperClock-2 module, select **Tools > Run Tcl Script** (Figure 1-15). In the following Run Script window, navigate to the `setup_scm2_156_25.tcl` script in the extracted files and click **OK**.

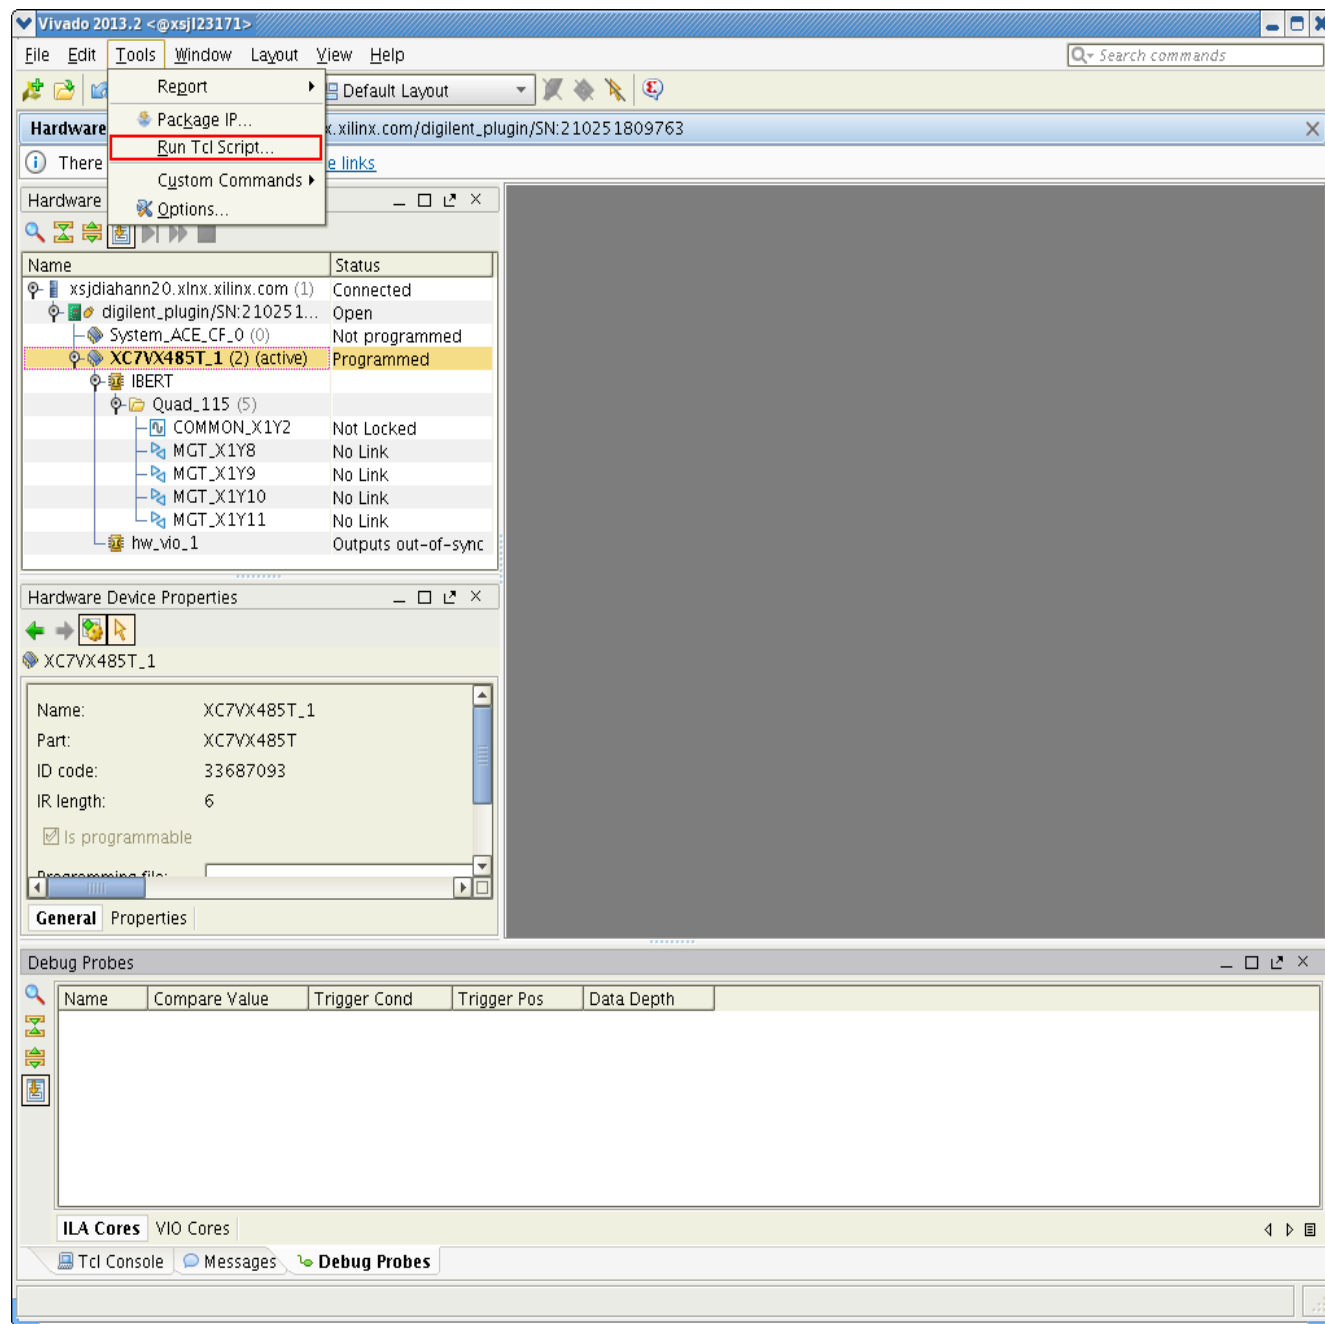

UG847_c1_15_052413

Figure 1-15: Run Tcl Script...

- To view the SuperClock-2 Module VIO core, select the **VIO Cores** view in the Debug Probes tab of the Debug Probes window (Figure 1-16).

Note: The ROM address values for the Si5368 and Si570 devices (that is, si5368_addr[6:0] and si570_addr[6:0]) are preset to 60 to produce an output frequency of 156.250 MHz. Entering a different ROM address changes the reference clock(s) frequency. The complete list of pre-programmed SuperClock-2 frequencies and their associated ROM addresses is provided in Table 1-2, page 23.

Name	Value	Activity
hw_vio_1		
vio_inputs		
u_scm2/u_vio_sclk2_control/i2c_ack	[H] 1	
u_scm2/u_vio_sclk2_control/i2c_done	[H] 0	
u_scm2/u_vio_sclk2_control/i2c_rd_data[7:0]	[H] 00	
u_scm2/u_vio_sclk2_control/pca0_ctrl[5:0]	[H] 00	
u_scm2/u_vio_sclk2_control/pca1_ctrl[5:0]	[H] 00	
u_scm2/u_vio_sclk2_control/sclk_in[8:0]	[H] 00A	
u_scm2/u_vio_sclk2_control/sclk_out[5:0]	[H] 08	
u_scm2/u_vio_sclk2_control/si5368_done	[H] 0	
u_scm2/u_vio_sclk2_control/si5368_freq[19:0]	[U] 156250	
u_scm2/u_vio_sclk2_control/si570_done	[H] 0	
u_scm2/u_vio_sclk2_control/si570_freq[19:0]	[U] 156250	
vio_outputs		
u_scm2/u_vio_sclk2_control/i2c_dev_addr[7:0]	[H] 00	
u_scm2/u_vio_sclk2_control/i2c_noreg	[H] 0	
u_scm2/u_vio_sclk2_control/i2c_reg_addr[7:0]	[H] 00	
u_scm2/u_vio_sclk2_control/i2c_start	[H] 0	
u_scm2/u_vio_sclk2_control/i2c_wr_data[7:0]	[H] 00	
u_scm2/u_vio_sclk2_control/pca0_ctrl_1[5:0]	[H] 00	
u_scm2/u_vio_sclk2_control/pca1_ctrl_1[5:0]	[H] 00	
u_scm2/u_vio_sclk2_control/sclk2_reset	[H] 0	
u_scm2/u_vio_sclk2_control/sclk_out_1[5:0]	[H] 08	
u_scm2/u_vio_sclk2_control/si5368_addr[6:0]	[U] 60	
u_scm2/u_vio_sclk2_control/si5368_clkin[1:0]	[H] 1	
u_scm2/u_vio_sclk2_control/si5368_clkwr	[H] 0	
u_scm2/u_vio_sclk2_control/si5368_dsb[4:0]	[H] 00	
u_scm2/u_vio_sclk2_control/si5368_reset	[H] 0	
u_scm2/u_vio_sclk2_control/si5368_start	[H] 0	
u_scm2/u_vio_sclk2_control/si570_addr[6:0]	[U] 60	
u_scm2/u_vio_sclk2_control/si570_idcode[6:0]	[H] 55	
u_scm2/u_vio_sclk2_control/si570_recall	[H] 0	
u_scm2/u_vio_sclk2_control/si570_start	[H] 0	

Annotations:

- The ROM address value for the Si5368 and Si570 clock multiplier is preset to 60 (156.25 MHz)
- Si5368 and Si570 Start button (Clock starts on a rising edge)


Bottom Panel:

- ILA Cores: **VIO Cores**
- Tcl Console
- Messages
- Debug Probes**

UG847_c1_16_052413

Figure 1-16: SuperClock-2 Module VIO Core

- To view the GTX transceiver operation, click Layout > Serial I/O Analyzer. In the Links window, right-click and select **Create Links...** or press the **Create Links** button (Figure 1-19).

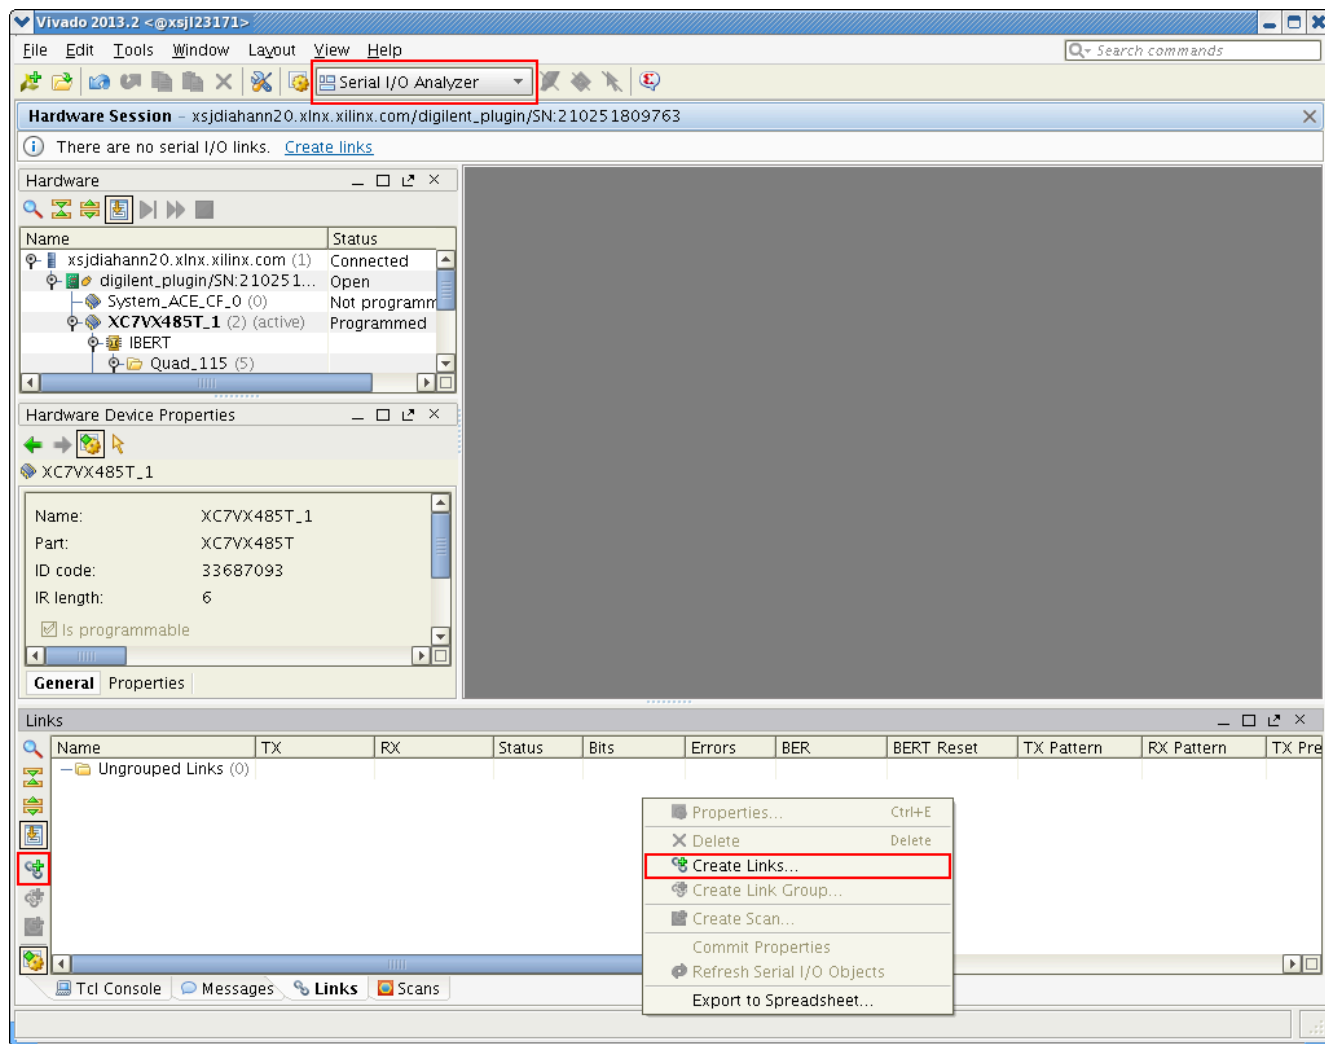

UG847_c1_17_052413

Figure 1-17: Serial I/O Analyzer - Create Links...

6. A Create Links window pops up. In this window you can link any TX to RX GTs. To create links, select the TX GT and RX GT from the two lists, then press the **Add (+)** button. For this project, connect the following links:


MGT_X1Y8/TX to MGT_X1Y8/RX

MGT_X1Y9/TX to MGT_X1Y9/RX

MGT_X1Y10/TX to MGT_X1Y10/RX

MGT_X1Y11/TX to MGT_X1Y11/RX

This is shown in Figure 1-18.

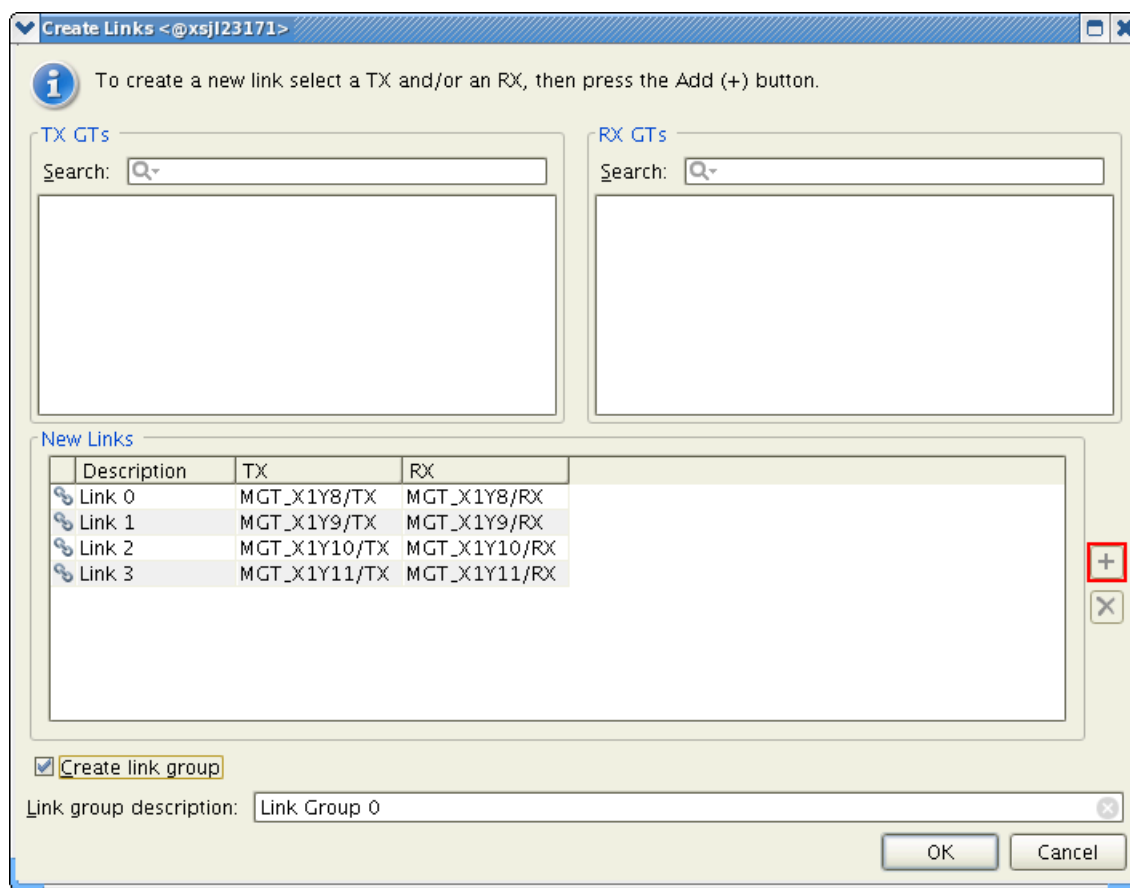

UG847_c1_18_052413


Figure 1-18: Create Links Window

Viewing GTX Transceiver Operation

After completing [step 6](#) in [Starting the SuperClock-2 Module](#), the IBERT demonstration is configured and running. The status and test settings are displayed on the Links tab in the Links window shown in [Figure 1-19](#).

Note the line rate, TX differential output swing, and error count:

- The line rate for all four GTX transceivers is 12.5 Gb/s (see **Status** in [Figure 1-19](#)).
- The GTX transmitter differential output swing is preset to 250 mV.
- Verify that there are no bit errors.

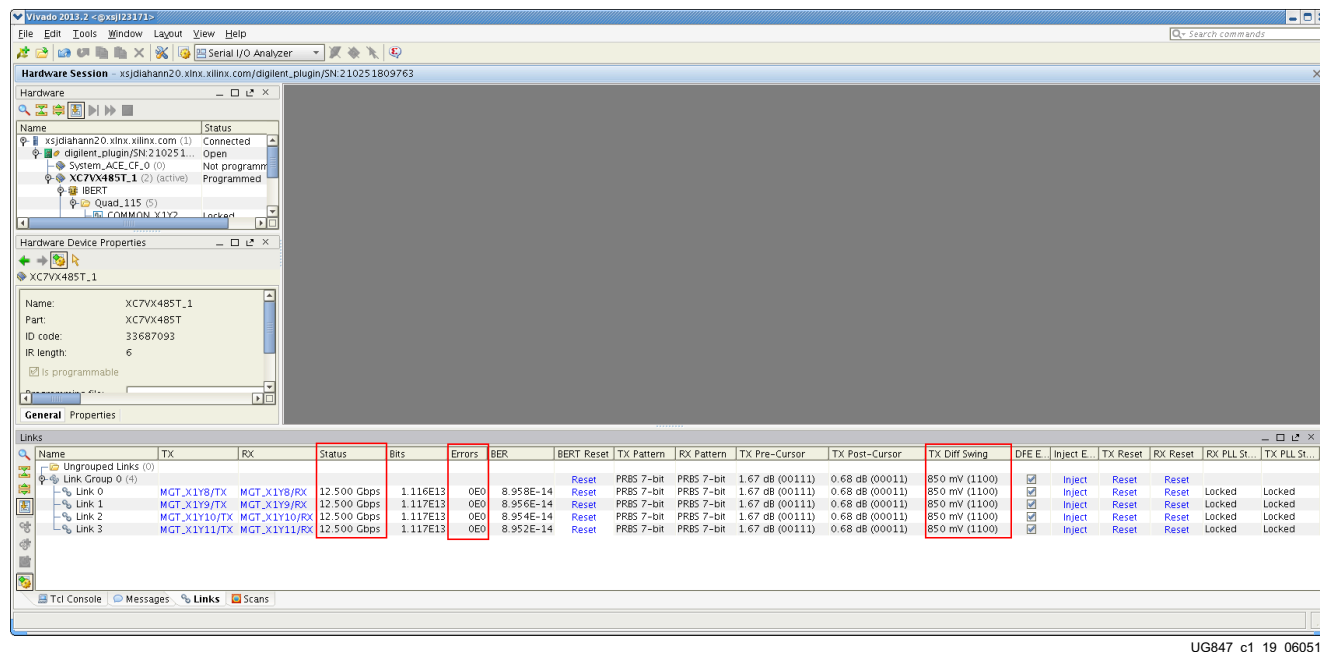

UG847_c1_19_060513

Figure 1-19: Serial I/O Analyzer Links

Additional information on the Vivado Design Suite software and IBERT core can be found in *Vivado Design Suite User Guide: Programming and Debugging* ([UC908](#)) and *LogiCORE IP Integrated Bit Error Ratio Tester (IBERT) for 7 Series GTX Transceivers Product Guide for Vivado Design Suite* ([PG132](#)).

Closing the IBERT Demonstration

To stop the IBERT demonstration:

1. Close the Vivado Design Suite application by selecting **File > Exit**.
2. Place the main power switch SW1 in the off position.

SuperClock-2 Frequency Table

Table 1-2 lists the addresses for the frequencies that are programmed into the SuperClock-2 read-only-memory (ROM).

Table 1-2: Si570 and Si5368 Frequency Table

Address	Protocol	Frequency (MHz)	Address	Protocol	Frequency (MHz)	Address	Protocol	Frequency (MHz)
0	100GE/40GE/10GE	161.130	30	OBSAI	307.200	60	XAUI	156.250
1	Aurora	81.250	31	OBSAI	614.400	61	XAUI	312.500
2	Aurora	162.500	32	OC-48	19.440	62	XAUI	625.000
3	Aurora	325.000	33	OC-48	77.760	63	Generic	66.667
4	Aurora	650.000	34	OC-48	155.520	64	Generic	133.333
5	CE111	173.370	35	OC-48	311.040	65	Generic	166.667

Table 1-2: Si570 and Si5368 Frequency Table (Cont'd)

Address	Protocol	Frequency (MHz)	Address	Protocol	Frequency (MHz)	Address	Protocol	Frequency (MHz)
6	CPRI	61.440	36	OC-48	622.080	66	Generic	266.667
7	CPRI	122.880	37	OTU-1	166.629	67	Generic	333.333
8	CPRI	153.630	38	OTU-1	333.257	68	Generic	533.333
9	CPRI	245.760	39	OTU-1	666.514	69	Generic	644.000
10	CPRI	491.520	40	OTU-1	666.750	70	Generic	666.667
11	Display Port	67.500	41	OTU-2	167.330	71	Generic	205.000
12	Display Port	81.000	42	OTU-2	669.310	72	Generic	210.000
13	Display Port	135.000	43	OTU-3	168.050	73	Generic	215.000
14	Display Port	162.000	44	OTU-4	174.690	74	Generic	220.000
15	Fibrechannel	106.250	45	PCIe	100.000	75	Generic	225.000
16	Fibrechannel	212.500	46	PCIe	125.000	76	Generic	230.000
17	Fibrechannel	425.000	47	PCIe	250.000	77	Generic	235.000
18	GigE	62.500	48	SATA	75.000	78	Generic	240.000
19	GigE	125.000	49	SATA	150.000	79	Generic	245.000
20	GigE	250.000	50	SATA	300.000	80	Generic	250.000
21	GigE	500.000	51	SATA	600.000	81	Generic	255.000
22	GPON	187.500	52	SDI	74.250	82	Generic	260.000
23	Interlaken	132.813	53	SDI	148.500	83	Generic	265.000
24	Interlaken	195.313	54	SDI	297.000	84	Generic	270.000
25	Interlaken	265.625	55	SDI	594.000	85	Generic	275.000
26	Interlaken	390.625	56	SMPTE435M	167.063	86	Generic	280.000
27	Interlaken	531.250	57	SMPTE435M	334.125	87	Generic	285.000
28	OBSAI	76.800	58	SMPTE435M	668.250	88	Generic	290.000
29	OBSAI	153.600	59	XAU1	78.125	89	Generic	295.000
90	Generic	300.000	103	Generic	365.000	116	Generic	430.000
91	Generic	305.000	104	Generic	370.000	117	Generic	435.000
92	Generic	310.000	105	Generic	375.000	118	Generic	440.000
93	Generic	315.000	106	Generic	380.000	119	Generic	445.000
94	Generic	320.000	107	Generic	385.000	120	Generic	450.000
95	Generic	325.000	108	Generic	390.000	121	Generic	455.000
96	Generic	330.000	109	Generic	395.000	122	Generic	460.000
97	Generic	335.000	110	Generic	400.000	123	Generic	465.000
98	Generic	340.000	111	Generic	405.000	124	Generic	470.000
99	Generic	345.000	112	Generic	410.000	125	Generic	475.000
100	Generic	350.000	113	Generic	415.000	126	Generic	480.000

Table 1-2: Si570 and Si5368 Frequency Table (Cont'd)

Address	Protocol	Frequency (MHz)	Address	Protocol	Frequency (MHz)	Address	Protocol	Frequency (MHz)
6	CPRI	61.440	36	OC-48	622.080	66	Generic	266.667
7	CPRI	122.880	37	OTU-1	166.629	67	Generic	333.333
8	CPRI	153.630	38	OTU-1	333.257	68	Generic	533.333
9	CPRI	245.760	39	OTU-1	666.514	69	Generic	644.000
10	CPRI	491.520	40	OTU-1	666.750	70	Generic	666.667
11	Display Port	67.500	41	OTU-2	167.330	71	Generic	205.000
12	Display Port	81.000	42	OTU-2	669.310	72	Generic	210.000
13	Display Port	135.000	43	OTU-3	168.050	73	Generic	215.000
14	Display Port	162.000	44	OTU-4	174.690	74	Generic	220.000
15	Fibrechannel	106.250	45	PCIe	100.000	75	Generic	225.000
16	Fibrechannel	212.500	46	PCIe	125.000	76	Generic	230.000
17	Fibrechannel	425.000	47	PCIe	250.000	77	Generic	235.000
18	GigE	62.500	48	SATA	75.000	78	Generic	240.000
19	GigE	125.000	49	SATA	150.000	79	Generic	245.000
20	GigE	250.000	50	SATA	300.000	80	Generic	250.000
21	GigE	500.000	51	SATA	600.000	81	Generic	255.000
22	GPON	187.500	52	SDI	74.250	82	Generic	260.000
23	Interlaken	132.813	53	SDI	148.500	83	Generic	265.000
24	Interlaken	195.313	54	SDI	297.000	84	Generic	270.000
25	Interlaken	265.625	55	SDI	594.000	85	Generic	275.000
26	Interlaken	390.625	56	SMPTE435M	167.063	86	Generic	280.000
27	Interlaken	531.250	57	SMPTE435M	334.125	87	Generic	285.000
28	OBSAI	76.800	58	SMPTE435M	668.250	88	Generic	290.000
29	OBSAI	153.600	59	XAU1	78.125	89	Generic	295.000
90	Generic	300.000	103	Generic	365.000	116	Generic	430.000
91	Generic	305.000	104	Generic	370.000	117	Generic	435.000
92	Generic	310.000	105	Generic	375.000	118	Generic	440.000
93	Generic	315.000	106	Generic	380.000	119	Generic	445.000
94	Generic	320.000	107	Generic	385.000	120	Generic	450.000
95	Generic	325.000	108	Generic	390.000	121	Generic	455.000
96	Generic	330.000	109	Generic	395.000	122	Generic	460.000
97	Generic	335.000	110	Generic	400.000	123	Generic	465.000
98	Generic	340.000	111	Generic	405.000	124	Generic	470.000
99	Generic	345.000	112	Generic	410.000	125	Generic	475.000
100	Generic	350.000	113	Generic	415.000	126	Generic	480.000

Table 1-2: Si570 and Si5368 Frequency Table (Cont'd)

Address	Protocol	Frequency (MHz)	Address	Protocol	Frequency (MHz)	Address	Protocol	Frequency (MHz)
101	Generic	355.000	114	Generic	420.000	127	Generic	485.000
102	Generic	360.000	115	Generic	425.000			

Creating the GTX IBERT Core

Vivado Design Suite version 2013.2 or higher is required to rebuild the designs shown here.

This section provides a procedure to create a single Quad GTX IBERT core with integrated SuperClock-2 controller. The procedure assumes Quad 113 and 12.5 Gb/s line rate, but cores for any of the GTX Quads with any supported line rate can be created following the same series of steps.

For more details on generating IBERT cores, refer to *Vivado Design Suite User Guide: Programming and Debugging* ([UG908](#)).

1. Start the Vivado Design Suite.


2. In the Vivado design tools window, click the **Manage IP** icon, then select **Open IP Catalog** (highlighted in Figure 1-20).



Figure 1-20: Initial window, Vivado Design Suite

3. When the Create a New Customized IP Location dialog window opens (not shown), click **Next**.


- In the Manage IP Settings window, select a part by clicking the (...) button next to the Part field. A Select Device window pops up. Use the drop-down menu items to narrow the choices. Select the **xc7vx485tffg1761-3** device (Figure 1-21). Click **OK**.

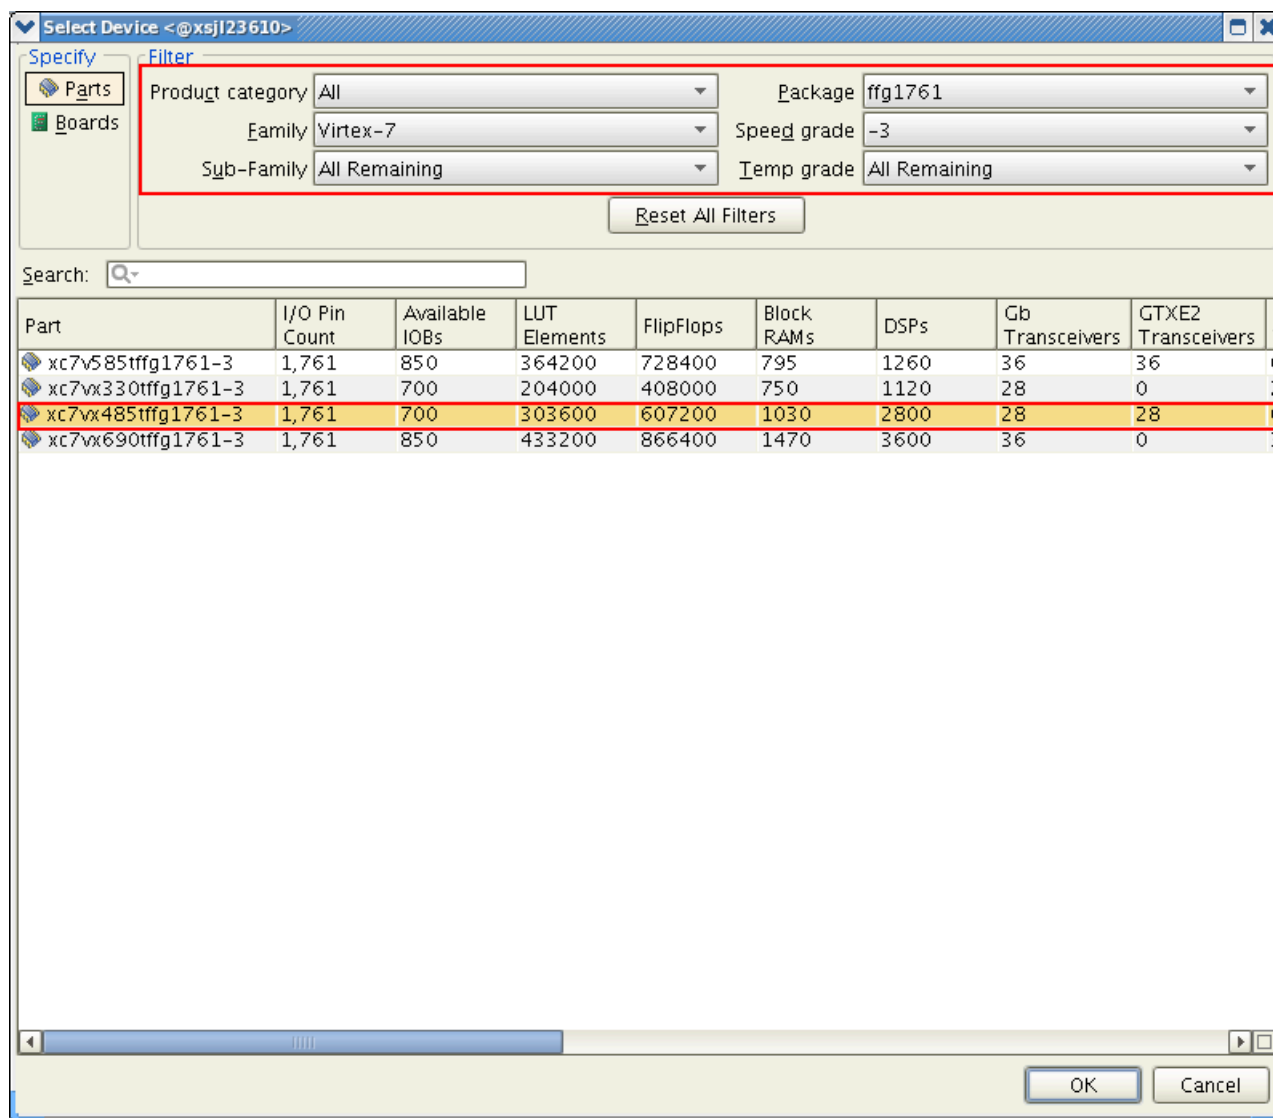

UG847_c1_21_052413

Figure 1-21: Select Device


- Back on the Manage IP Settings window, select **Verilog** for Target language, **Vivado Simulator** for Target simulator, and a directory to save the customized IP (Figure 1-22). Click **Finish**.

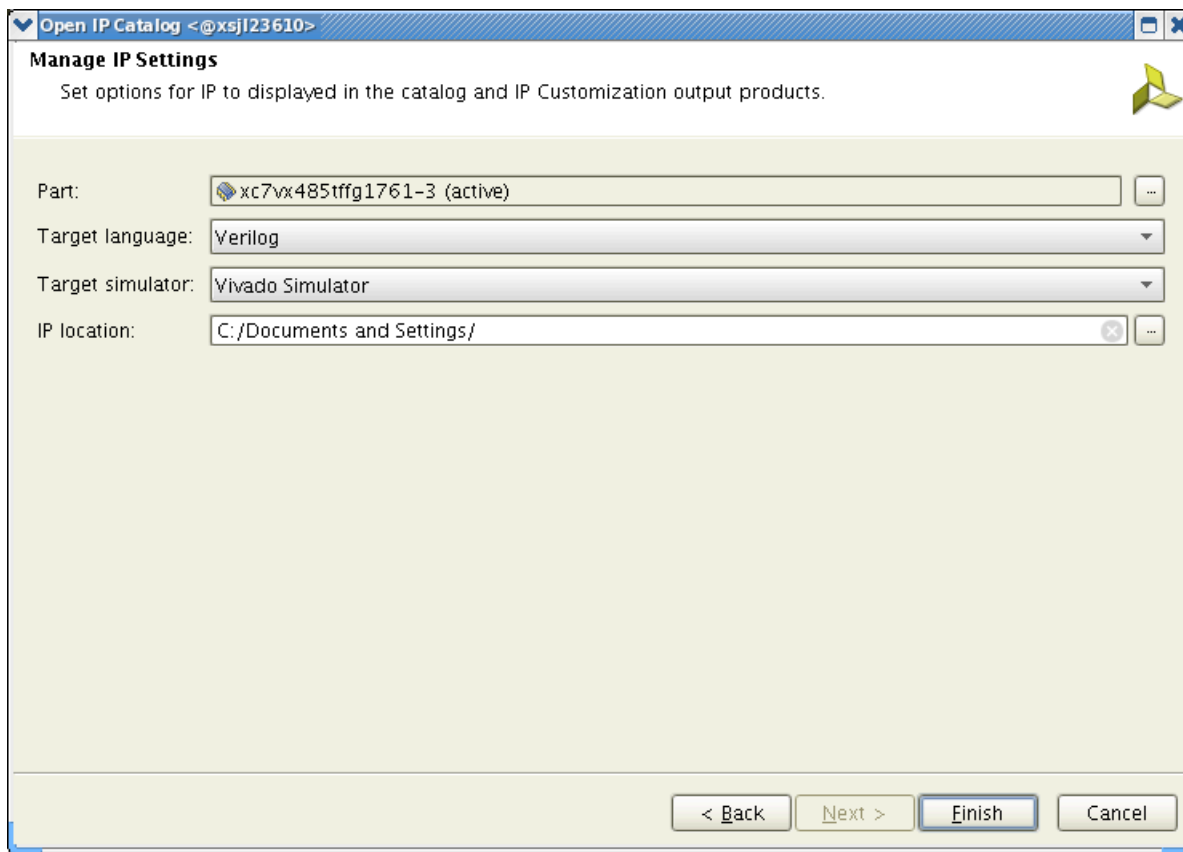

UG847_c1_22_052413

Figure 1-22: Manage IP Settings

6. In the Vivado IP Catalog window, open the **Debug & Verification** folder, then open the **Debug** folder, and double-click **IBERT 7 Series GTX** (Figure 1-23).

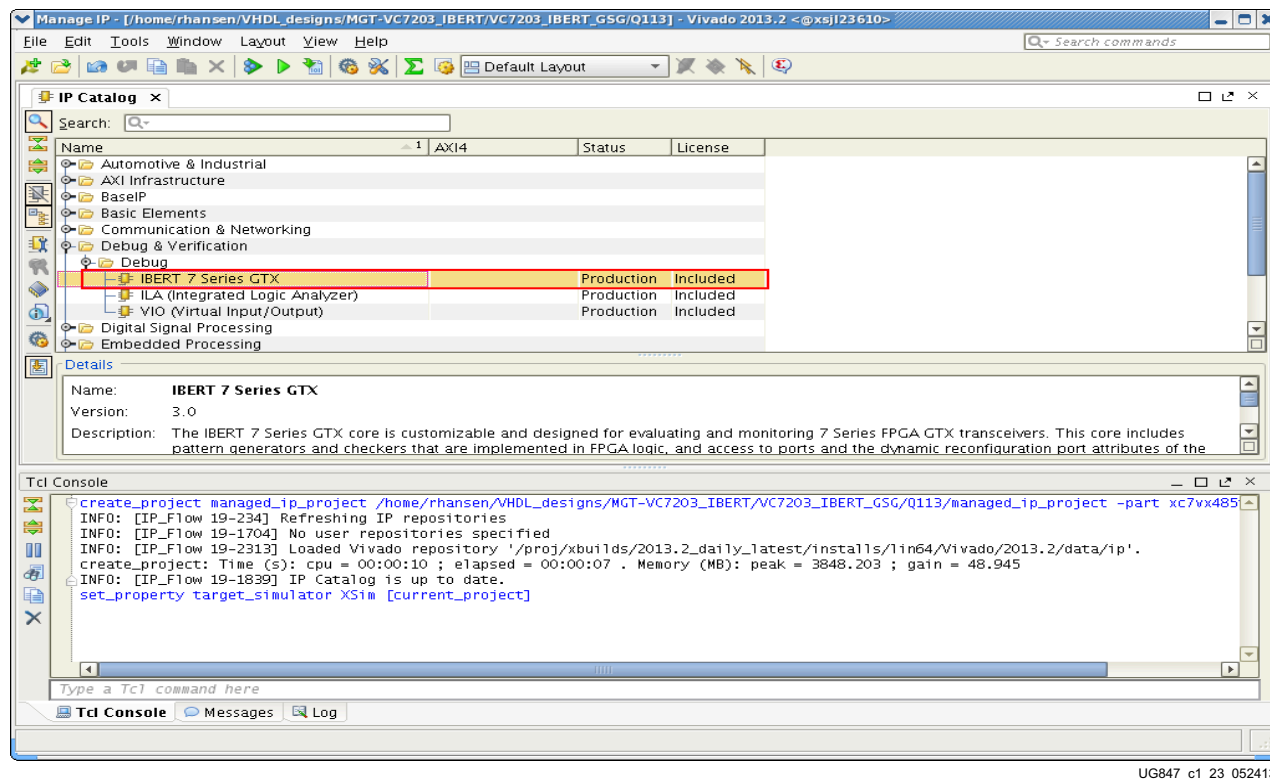

UG847_c1_23_052413

Figure 1-23: IP Catalog

7. A Customize IP window opens. In the Protocol Definition tab, change **LineRate (Gbps)** to **12.5**, then change **Refclk (MHz)** to **156.25**. Do not change the other defaults (Figure 1-24).

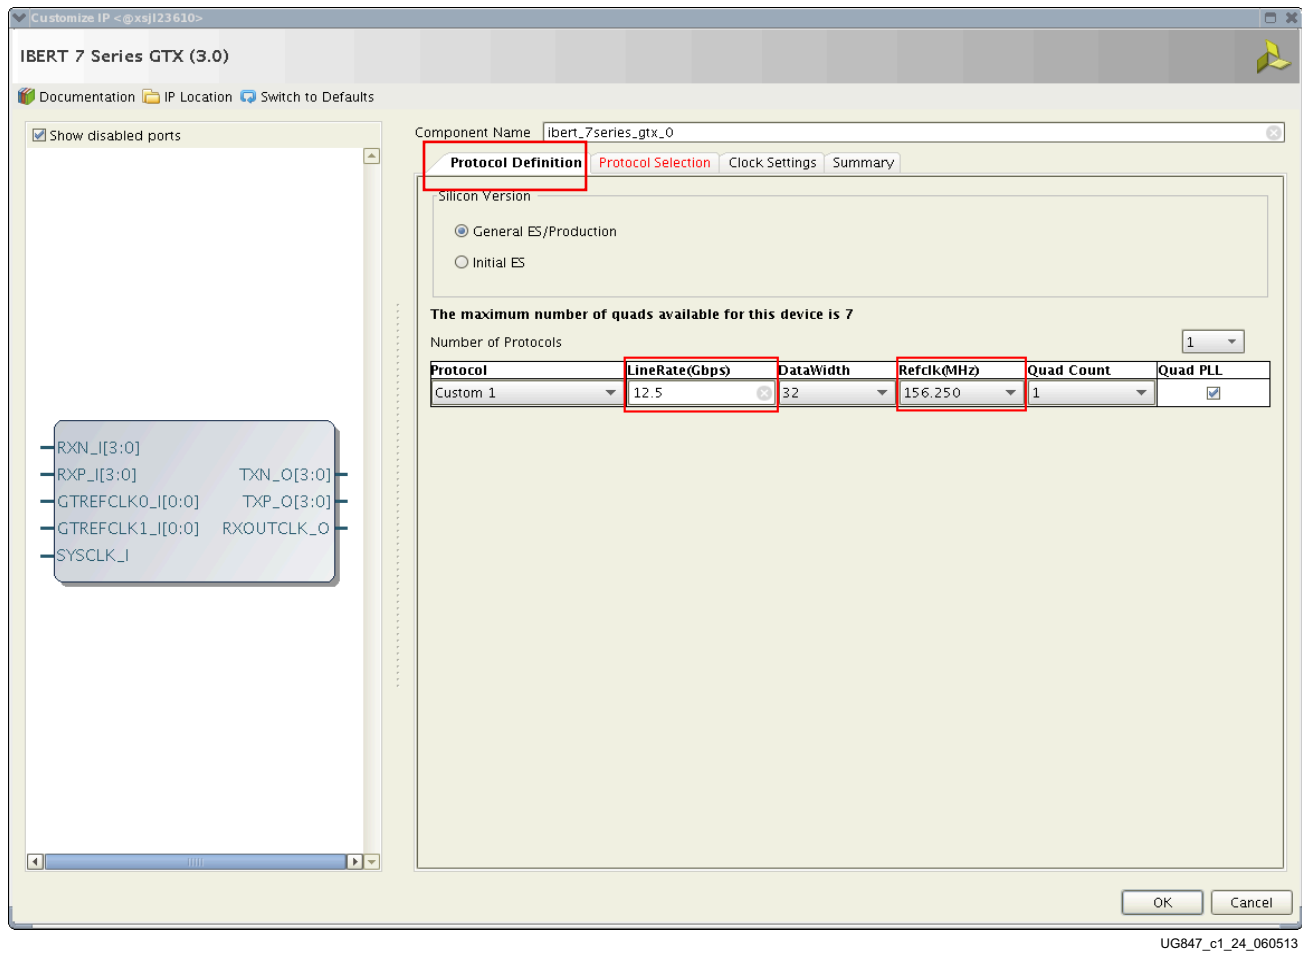


Figure 1-24: Customize IP - Protocol Definition

8. In the Protocol Selection tab, select **Custom 1 / 12.5 Gbps** in the drop-down menu under Protocol Selected next to **QUAD_113**, and select **MGTREFCLK1 113** in the Refclk Selection drop-down menu (Figure 1-25).

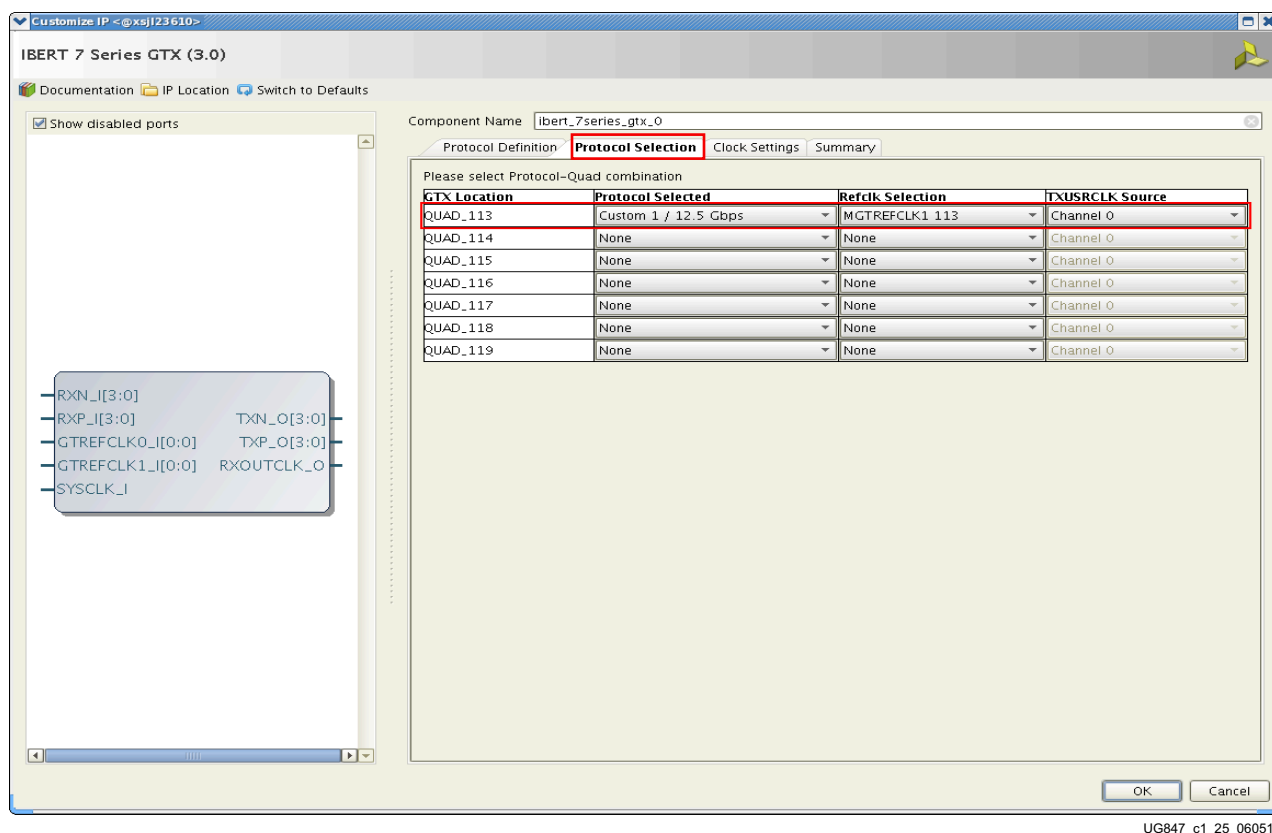


Figure 1-25: Customize IP - Protocol Selection

- In the Clock Settings tab, select **DIFF SSTL15** for the I/O Standard, enter **E19** for P Package Pin and **E18** for N Package Pin (the FPGA pins that the system clock connects to), and make sure the Frequency is set to **200.00** (Figure 1-26). Press **OK**. A Generate Output Products window opens. Leave the defaults unchanged, and press **OK**.


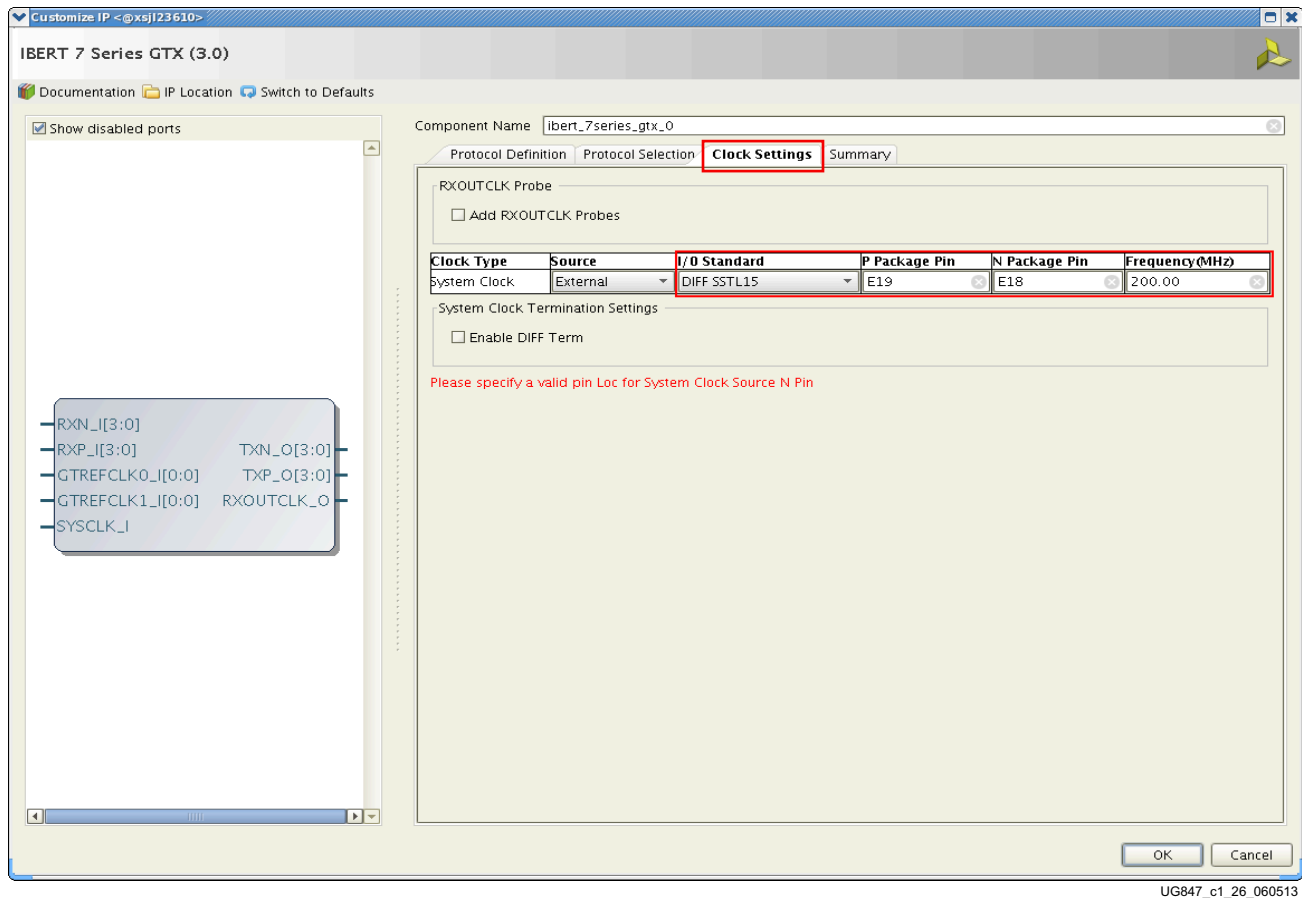


Figure 1-26: Customize IP - Clock Settings


- Back to Manage IP, in the Sources window, right-click the **IBERT IP** and select **Open IP Example Design** (Figure 1-27). Specify a location to save the design, press **OK**, and the design opens in a new Vivado design tools window.

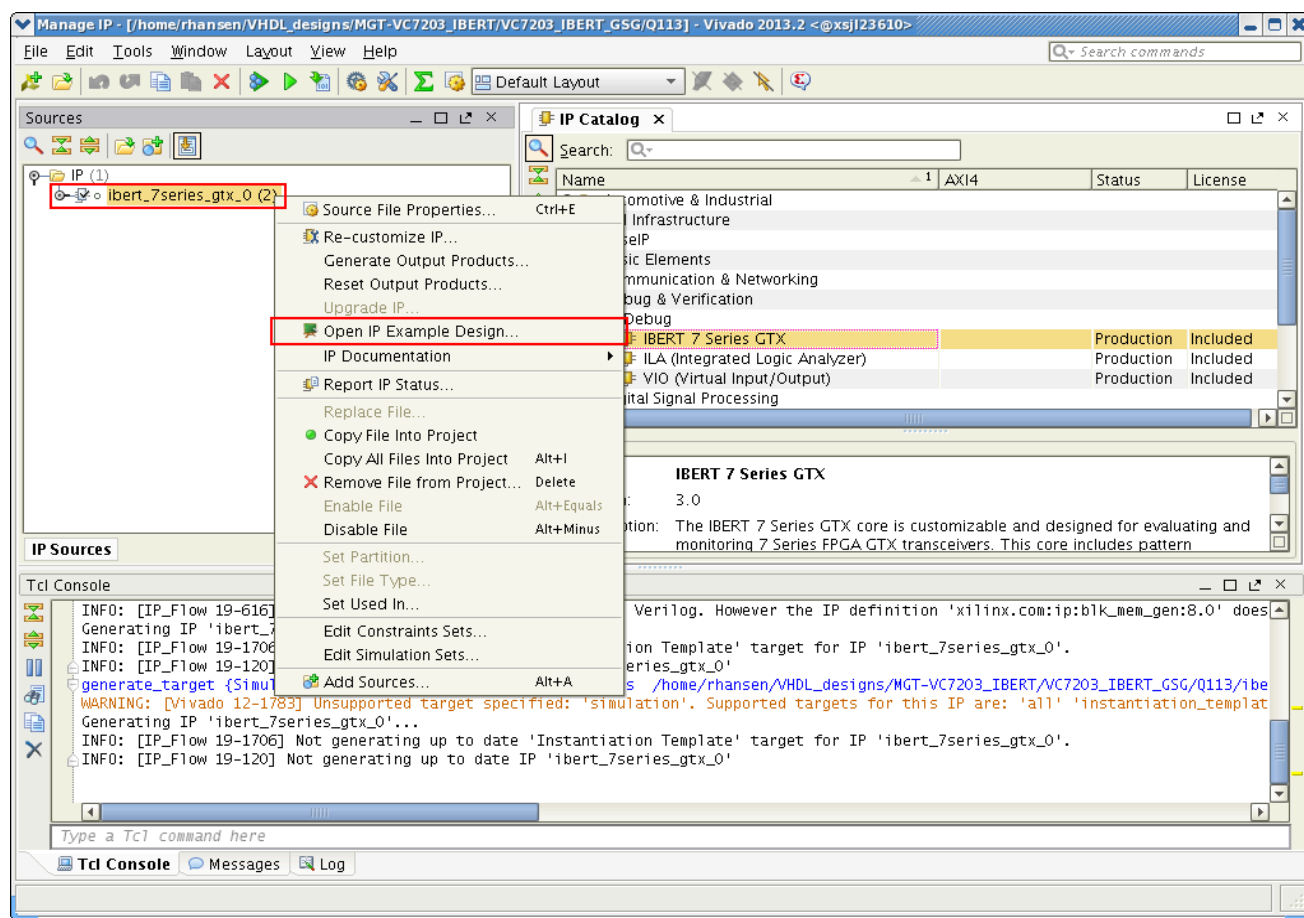

UG847_c1_27_052413

Figure 1-27: Open Example Design

11. In the new window, select **Tools > Run Tcl Script**. In the Run Script window, navigate to `add_scm2.tcl` in the extracted files and press **OK**. The SuperClock-2 Module Design Sources and Constraints are automatically added to the example design (Figure 1-28).

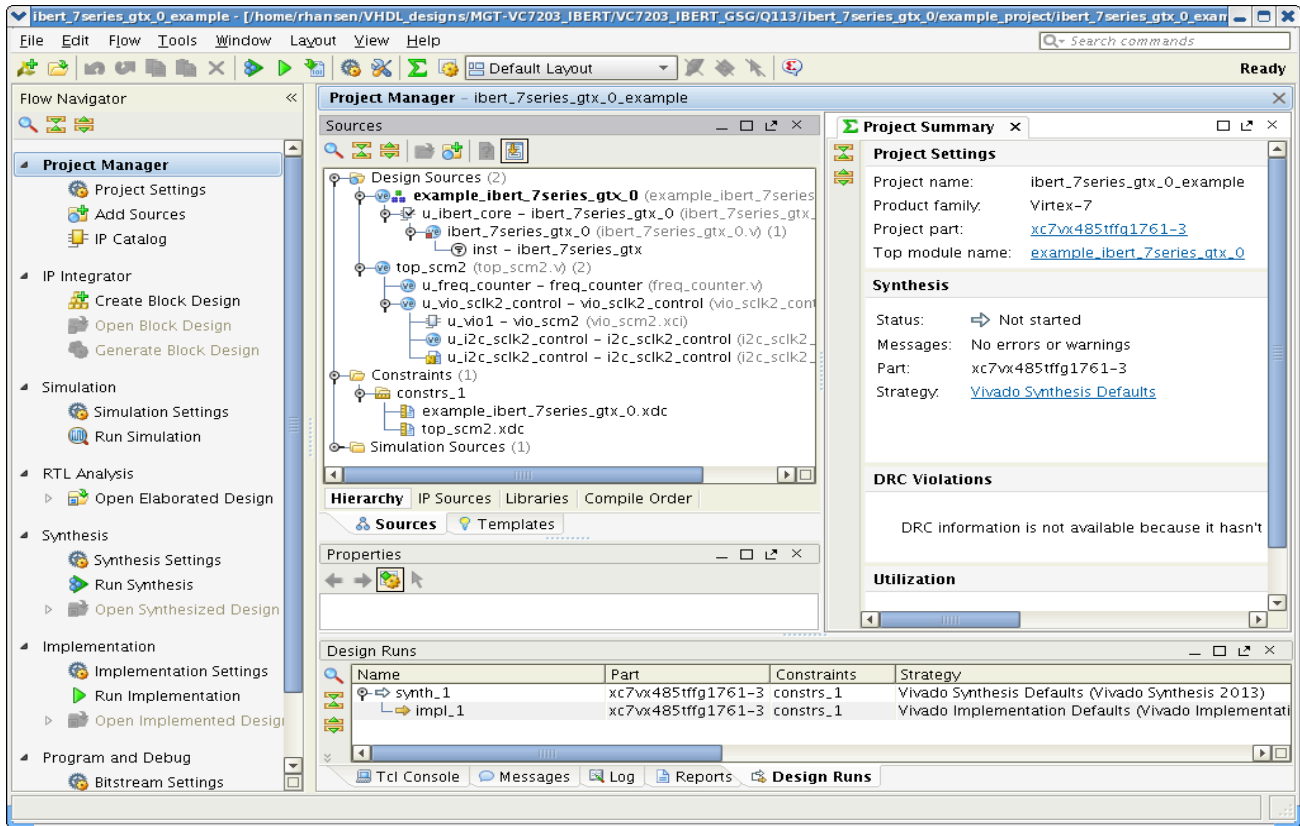

UG847_c1_28_052413

Figure 1-28: Sources after Running add_scm2.tcl

12. The SuperClock-2 source code now needs to be added to the example ibert wrapper. Double-click **example_ibert_7series_gtx_0** in the Design Sources to open the verilog code. Add the top level ports from **top_scm2.v** to the module declaration and instantiate the **top_scm2** module in the example ibert wrapper (Figure 1-29). Click **File > Save File**.

```


18
19 `define C_NUM_QUADS 1
20 `define C_REFCLKS_USED 1
21 module example_ibert_7series_gtx_0
22 (
23 // GT top level ports
24 output [(4*C_NUM_QUADS)-1:0] TXN_0,
25 output [(4*C_NUM_QUADS)-1:0] TXP_0,
26 input [(4*C_NUM_QUADS)-1:0] RXN_I,
27 input [(4*C_NUM_QUADS)-1:0] RXP_I,
28 input SYSCLKP_I,
29 input SYSCLKN_I,
30 input [(C_REFCLKS_USED)-1:0] GTREFCLKOP_I,
31 input [(C_REFCLKS_USED)-1:0] GTREFCLKON_I,
32 input [(C_REFCLKS_USED)-1:0] GTREFCLKIP_I,
33 input [(C_REFCLKS_USED)-1:0] GTREFCLKIN_I,
34 // SuperClock-2 Module top level ports
35 input [2:0] usrc1k_p,
36 input [2:0] usrc1k_n,
37 inout i2c_sda,
38 inout i2c_scl,
39 output [5:0] sclk_out,
40 input [8:0] sclk_in,
41 output [1:0] sclk_clk_p,
42 output [1:0] sclk_clk_n
43 );
44
45 //
46 // Ibert refclk internal signals
47 //
48 wire [(C_NUM_QUADS)-1:0] gtreclk0_i;
49 wire [(C_NUM_QUADS)-1:0] gtreclk1_i;
50 wire [(C_REFCLKS_USED)-1:0] refclk0_i;
51 wire [(C_REFCLKS_USED)-1:0] refclk1_i;
52 wire sysclk_i;
53
54 //
55 // SuperClock-2 Module instantiations
56 //
57 top_scm2 u_scm2
58 (
59 .sysclk_i(sysclk_i),
60 .usrc1k_p(usrc1k_p),
61 .usrc1k_n(usrc1k_n),
62 .i2c_sda(i2c_sda),
63 .i2c_scl(i2c_scl),
64 .sclk_out(sclk_out),
65 .sclk_in(sclk_in),
66 .sclk_clk_p(sclk_clk_p),
67 .sclk_clk_n(sclk_clk_n)
68 );
69
70 //
71 // Refclk IBUFDS instantiations
72 //
73
74 IBUFDS_GTE2 u_buf_q9_clk0

```

Figure 1-29: SuperClock-2 in the Example IBERT Wrapper

13. In the Sources window, Design Sources should now reflect that the SuperClock-2 module is part of the example IBERT design. Right-click the IBERT core .xci file in

Design Sources and select **Set Out-of-Context** (Figure 1-30). Press **OK** in the Set Partition window that pops up.

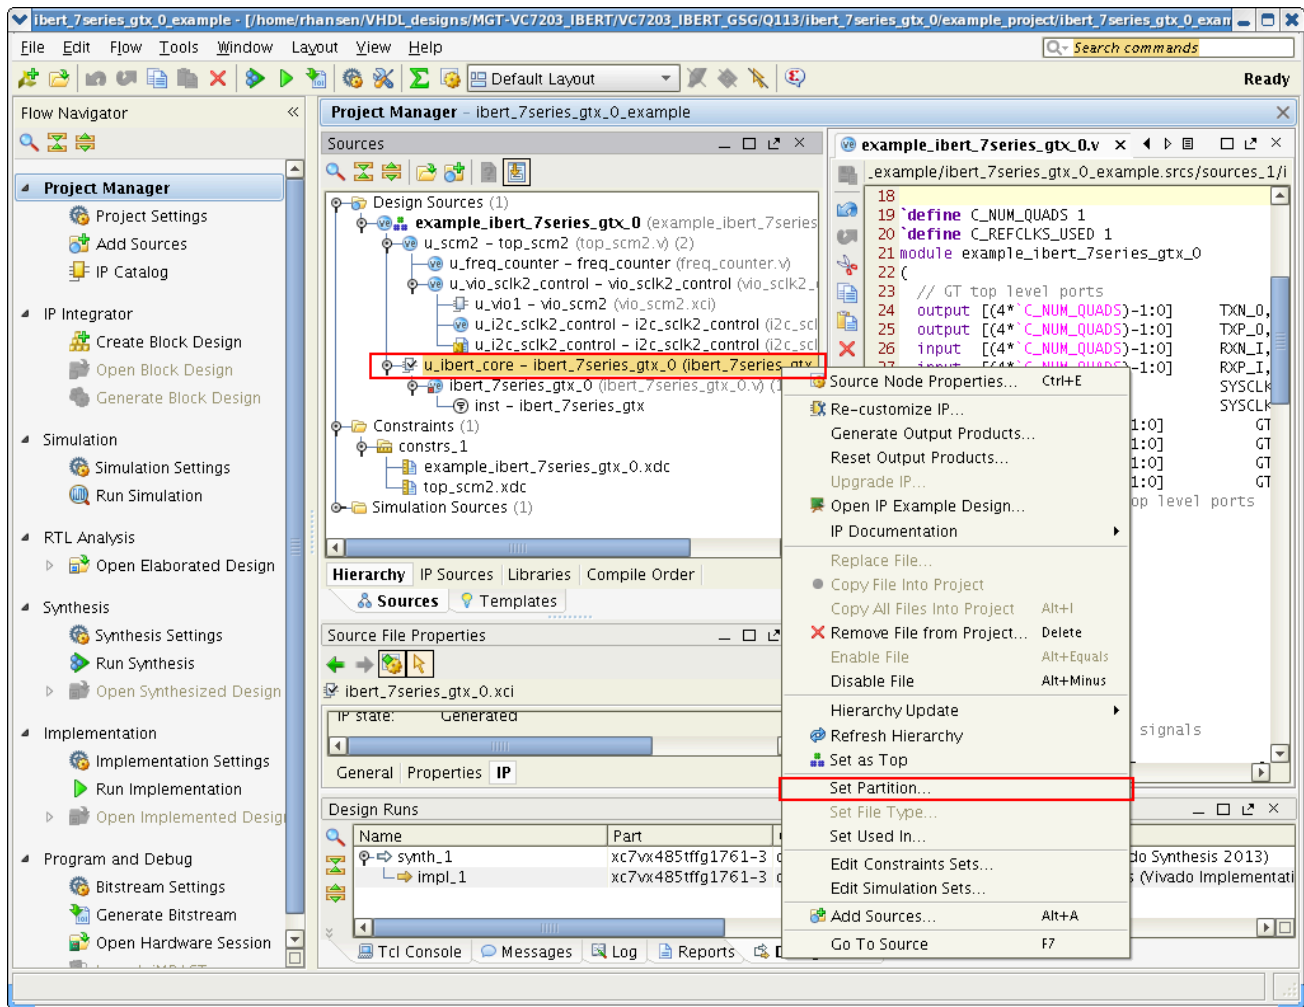

UG847_c1_30_052413

Figure 1-30: Set Partition

14. Synthesize the partitioned IBERT core only. To do this, right-click the IBERT synthesis run in the Design Runs window under Module Analysis Runs and select **Launch Runs** (Figure 1-31). In the Launch Selected Runs window, leave the defaults unchanged and click **OK**.


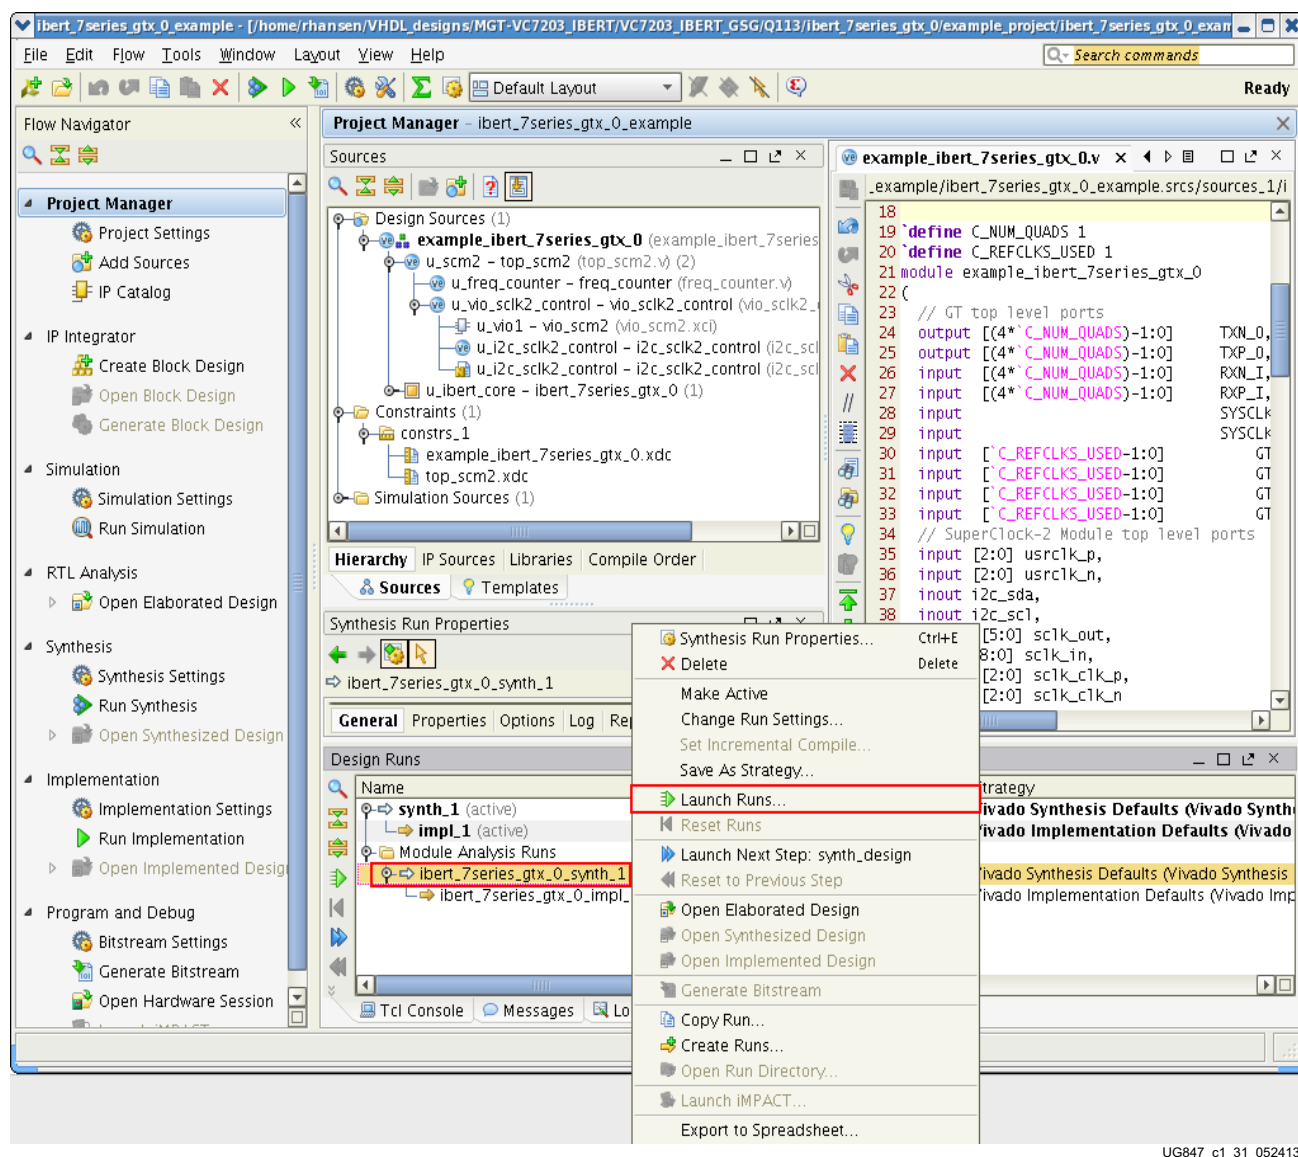


Figure 1-31: Synthesize IBERT Partition


15. When the synthesis is done, click **Run Synthesis** in the Flow Navigator, which synthesizes the rest of the design.
16. When that synthesis is done, a Synthesis Complete window pops up. Select **Open Synthesized Design** and click **OK** (Figure 1-32).

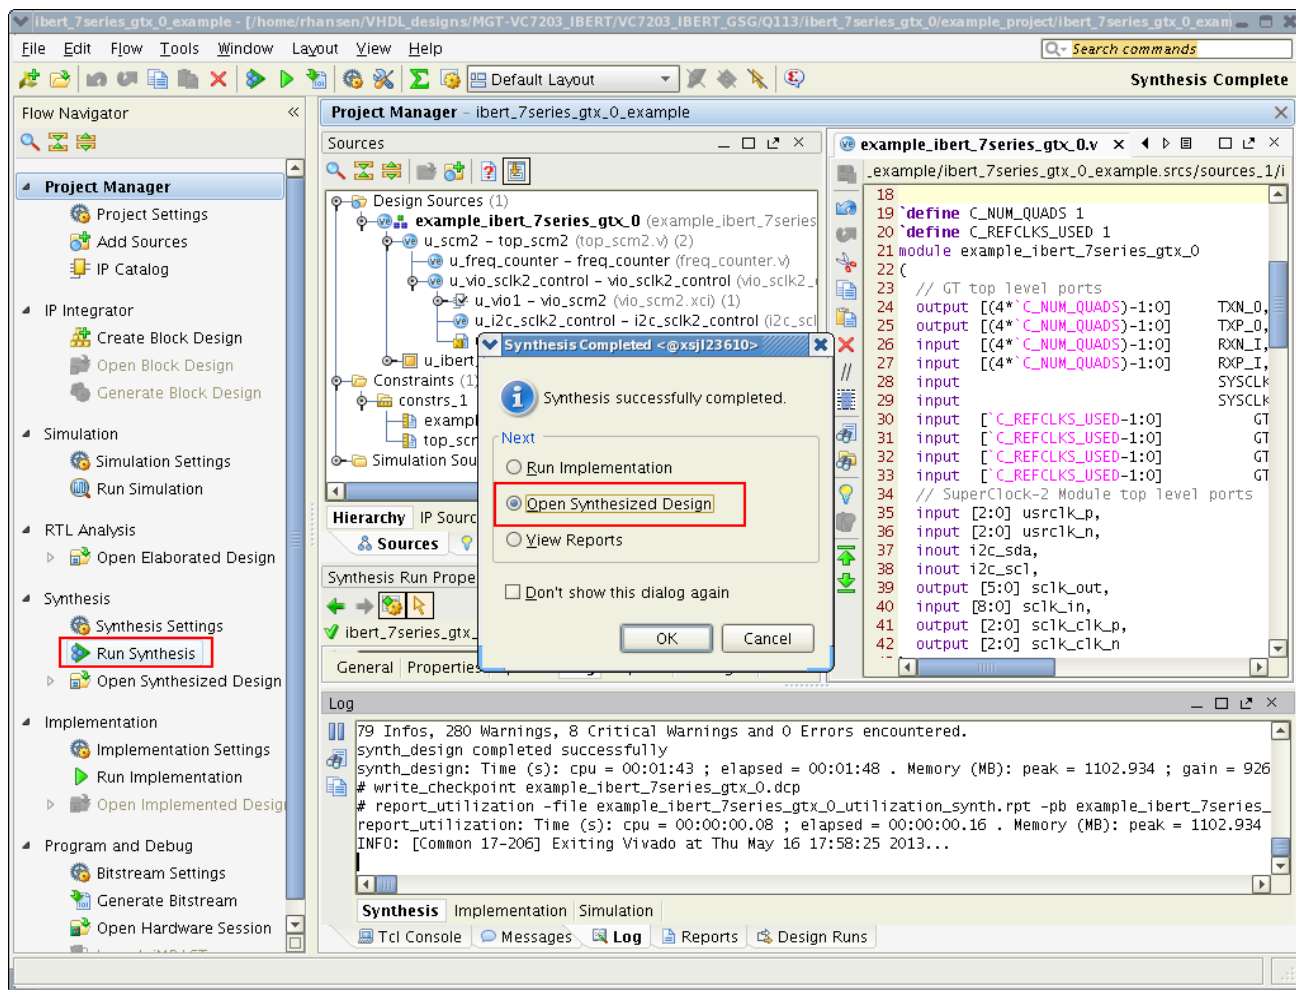

UG847_c1_32_052413

Figure 1-32: Synthesis Completed


17. When the Synthesized Design opens, select **dbg_hub** in the Netlist window, then select the **Debug Core Options** tab in the Cell Properties window and change **C_USER_SCAN_CHAIN*** to 2 (Figure 1-33). Click **File > Save Constraints**.

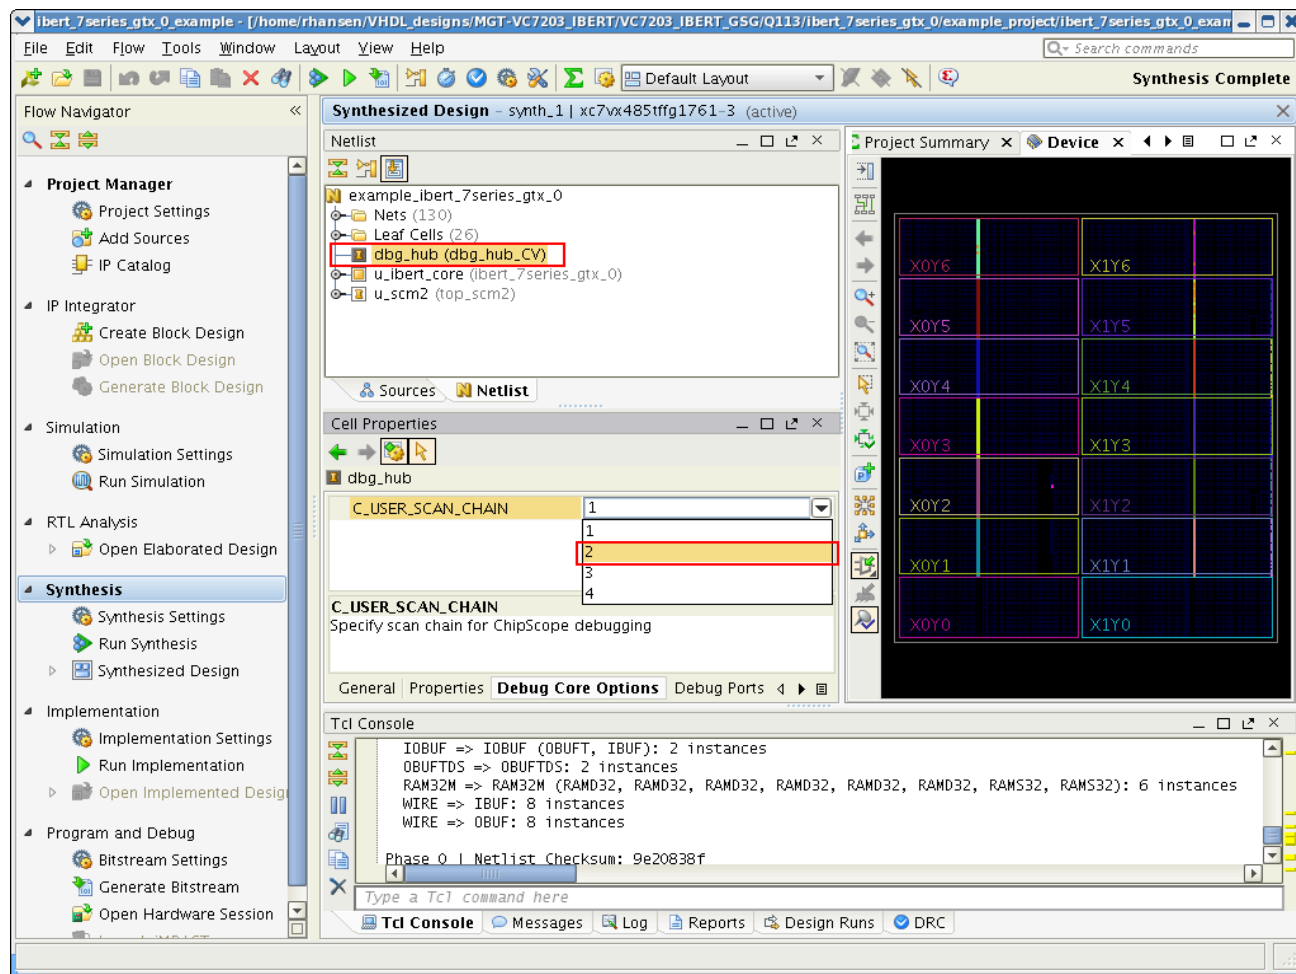

UG847_c1_33_052413

Figure 1-33: Debug Core Options for dbg_hub

18. In the Flow Navigator under Program and Debug, click **Generate Bitstream** (Figure 1-34). A window pops up asking if it is ok to launch implementation. Click **Yes**.

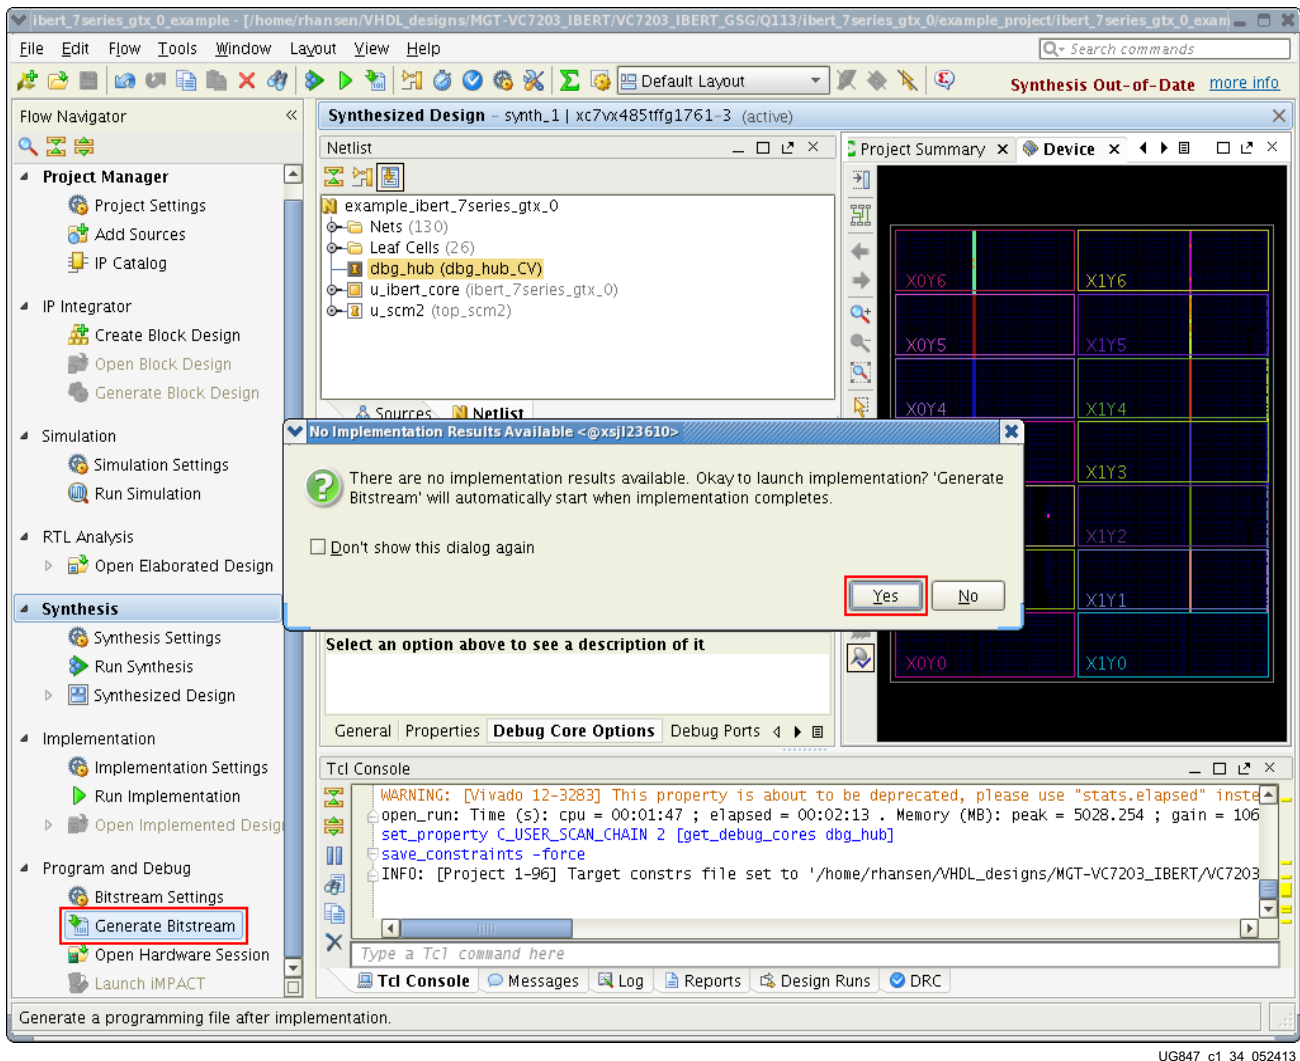

UG847_c1_34_052413

Figure 1-34: Generate Bitstream

19. When implementation completes, navigate to the project directory and locate the resultant bitstream here:
`\ibert_7series_gtx_0\example_project\ibert_7series_gtx_0_example\ibert_7series_gtx_0_example.runs\impl_1\.`

Appendix A

Additional Resources

Xilinx Resources

For support resources such as Answers, Documentation, Downloads, and Forums, see the Xilinx Support website at:

www.xilinx.com/support

For continual updates, add the Answer Record to your myAlerts:

www.xilinx.com/support/myalerts

For a glossary of technical terms used in Xilinx documentation, see:

www.xilinx.com/company/terms

Solution Centers

See the [Xilinx Solution Centers](#) for support on devices, software tools, and intellectual property at all stages of the design cycle. Topics include design assistance, advisories, and troubleshooting tips.

Further Resources

The most up to date information related to the VC7203 kit and its documentation is available on the following websites.

The Xilinx Virtex-7 FPGA VC7203 Characterization Kit product page:

www.xilinx.com/vc7203

The Virtex-7 FPGA VC7203 Characterization Kit - Known Issues and Release Notes Master Answer Record is [AR# 52383](#).

These Xilinx documents provide supplemental material useful with this guide:

[UG957](#), *VC7203 Virtex-7 FPGA GTX Transceiver Characterization Board User Guide*

[UG770](#), *HW-CLK-101-SCLK2 SuperClock-2 Module User Guide*


[UG908](#), *Vivado Design Suite User Guide: Programming and Debugging*

[PG132](#), *LogiCORE IP Integrated Bit Error Ratio Tester (IBERT) for 7 Series GTX Transceivers Product Guide for Vivado Design Suite*

Warranty

THIS LIMITED WARRANTY applies solely to standard hardware development boards and standard hardware programming cables manufactured by or on behalf of Xilinx (“Development Systems”). Subject to the limitations herein, Xilinx warrants that Development Systems, when delivered by Xilinx or its authorized distributor, for ninety (90) days following the delivery date, will be free from defects in material and workmanship and will substantially conform to Xilinx publicly available specifications for such products in effect at the time of delivery. This limited warranty excludes: (i) engineering samples or beta versions of Development Systems (which are provided “AS IS” without warranty); (ii) design defects or errors known as “errata”; (iii) Development Systems procured through unauthorized third parties; and (iv) Development Systems that have been subject to misuse, mishandling, accident, alteration, neglect, unauthorized repair or installation. Furthermore, this limited warranty shall not apply to the use of covered products in an application or environment that is not within Xilinx specifications or in the event of any act, error, neglect or default of Customer. For any breach by Xilinx of this limited warranty, the exclusive remedy of Customer and the sole liability of Xilinx shall be, at the option of Xilinx, to replace or repair the affected products, or to refund to Customer the price of the affected products. The availability of replacement products is subject to product discontinuation policies at Xilinx. Customer may not return product without first obtaining a customer return material authorization (RMA) number from Xilinx.

THE WARRANTIES SET FORTH HEREIN ARE EXCLUSIVE. XILINX DISCLAIMS ALL OTHER WARRANTIES, WHETHER EXPRESS, IMPLIED OR STATUTORY, INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT, AND ANY WARRANTY THAT MAY ARISE FROM COURSE OF DEALING, COURSE OF PERFORMANCE, OR USAGE OF TRADE. (2008.10)



Do not throw Xilinx products marked with the “crossed out wheeled bin” in the trash. Directive 2002/96/EC on waste electrical and electronic equipment (WEEE) requires the separate collection of WEEE. Your cooperation is essential in ensuring the proper management of WEEE and the protection of the environment and human health from potential effects arising from the presence of hazardous substances in WEEE. Return the marked products to Xilinx for proper disposal. Further information and instructions for free-of-charge return available at: www.xilinx.com/ehs/weee.htm.

