
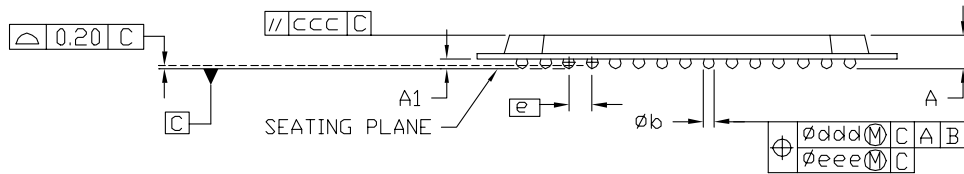


BOTTOM VIEW

TOP VIEW

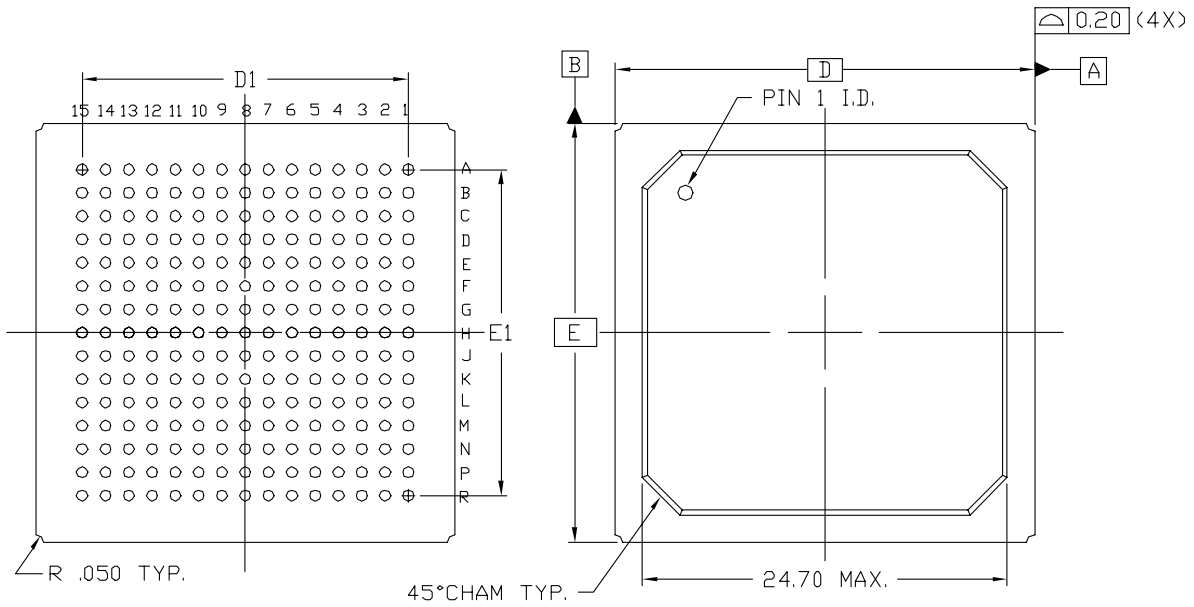

| SYMBOL | MILLIMETERS | | |
|--------------------------------|-----------------------|-----------------------|------|
| | MIN. | NOM. | MAX. |
| A | $\cancel{\text{---}}$ | 2.15 | 2.55 |
| A ₁ | 0.50 | 0.60 | 0.70 |
| D/E | 27.00 BSC | | |
| D ₁ /E ₁ | 21.00 REF. | | |
| e | 1.50 BSC | | |
| øb | 0.60 | 0.75 | 0.90 |
| ccc | $\cancel{\text{---}}$ | $\cancel{\text{---}}$ | 0.35 |
| ddd | $\cancel{\text{---}}$ | $\cancel{\text{---}}$ | 0.30 |
| eee | $\cancel{\text{---}}$ | $\cancel{\text{---}}$ | 0.15 |
| M | 15 | | |

NOTES:

1. ALL DIMENSIONS AND TOLERANCES CONFORM TO ANSI Y14.5M-1994
2. SYMBOL "M" IS THE PIN MATRIX SIZE.
3. CONFORMS TO JEDEC MS-034-CAL (DEPOPULATED)

225-BALL PLASTIC BGA (BG225)